


AIR
POWER

QUICLEAN

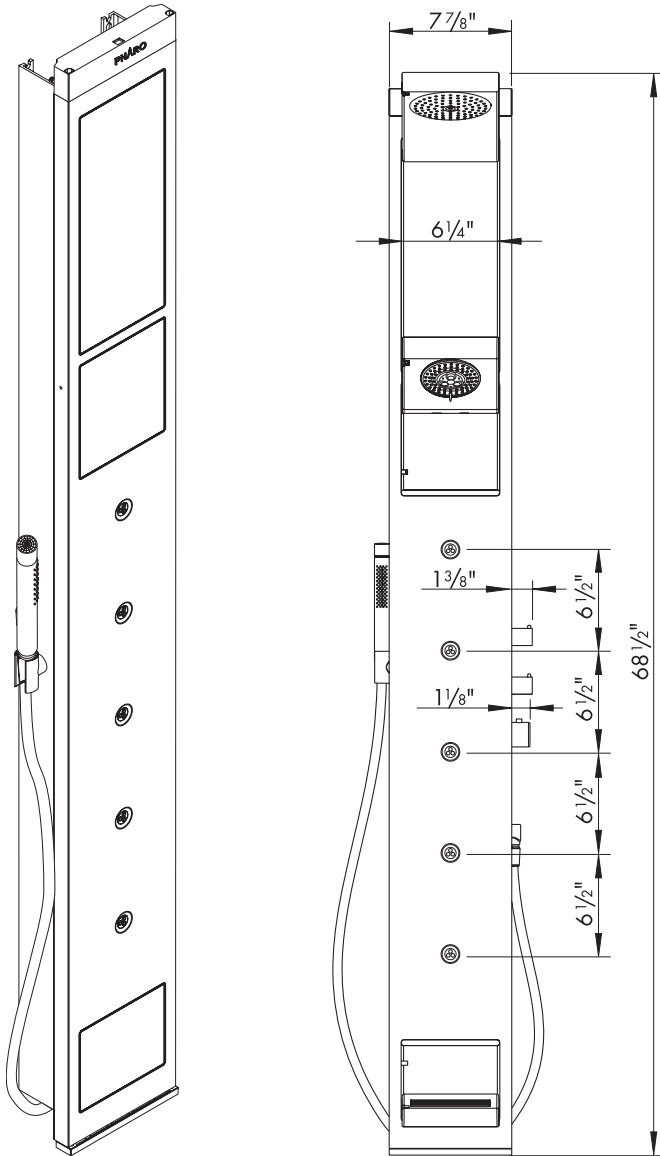

Product Features

- Anodized aluminum panel
- Overhead shower with refreshing full spray, air injection technology
Flow rate 2.5 gpm
- Neck spray with rain, whirl massage, and combination spray modes, air injection technology
Flow rate 2.5 gpm
- 5 Bodysprays
Flow rate 0.72 gpm each
- Axor Starck handshower with full and mono spray modes
Flow rate 2.5 gpm
- Thermostatic temperature control maintains temperature $\pm 1^\circ\text{F}$
- Protection against back siphonage provided by check valves
- Footrest, overhead shower, and neck spray can be folded closed when panel is not in use

Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO
- Approved for use in Massachusetts

Available Finishes

Satin chrome panel with chrome trim

26017001

Installation Notes

- The panel hangs on the finished wall.

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 1/2009