


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**6" LINE VOLTAGE DOWNLIGHTS**

**R-640**

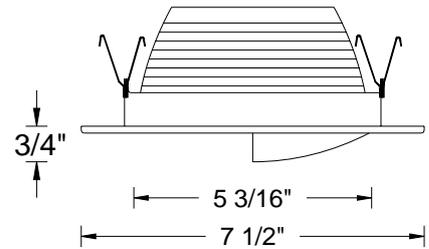

<b>Ordering Matrix</b>		
<b>Series</b>	<b>Model</b>	<b>Finish(Baffle/Trim)</b>
[ ]	[ ]	[ ]
R	640	WT/WT

Ordering Example (series – model number – finish): R-640-WT/WT

<b>Product Details</b>	
<b>Description:</b>	Recessed trim with scoop wall wash and step baffle. For use with R-6XX series Line voltage downlights.
<b>Materials:</b>	Durable stamped metal construction. Secured within lamp housing by steel spring clips. Provided with foam rubber gasket around outer perimeter.
<b>Lamping</b>	Utilizes medium base incandescent or 4-pin CFL lamps. Incandescent lamps are rated for up to 60W watts max. Compact Fluorescent lamps are rated for 32 watts max. Lamps are ordered separately.
<b>Finish:</b>	Abrasion resistant powder coat painted or plated metal finish. Trim and baffle are available in White.
<b>Listing:</b>	UL & CUL Listed. Suitable for damp locations.

<b>Specification Features</b>
<ul style="list-style-type: none"> <li>• Handles surfaces up to 1"</li> <li>• 5 year W.A.C. Lighting product warranty.</li> </ul>

**Compatible Housings(Sold separately)**

<p><b>R-600D-N-A</b></p> <p>NON-IC Rated. Air tight. New Construction A19 60W</p>		<p><b>R-601D-R-A</b></p> <p>NON-IC Rated. Air tight. Remodel housing. A19 60W</p>	
<p><b>R-660S-N-A</b></p> <p>NON-IC Rated. Air tight. New Construction Shallow housing. A19 60W</p>		<p><b>R-661S-R-A</b></p> <p>NON-IC Rated. Air tight. Remodel shallow housing. A19 60W</p>	
<p><b>R-F605D-N-ICA</b></p> <p>IC Rated. Air tight. New Construction 13W Max. CFL</p>		<p><b>R-F606D-R-ICA</b></p> <p>IC Rated. Air tight. Remodel housing. 13W Max. CFL</p>	
<p><b>R-F607D-N-A</b></p> <p>NON-IC Rated. Air tight. New Construction 32W Max. CFL</p>		<p><b>R-F608D-R-A</b></p> <p>NON-IC Rated. Air tight. Remodel housing 32W Max. CFL</p>	

W.A.C. reserves the right to change details that do not affect overall function and performance.