




<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**LEUCHTE COLLECTION**

**ENERGY EFFICIENT PENDANTS -BONGO**

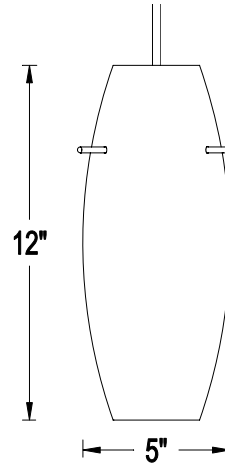

<b>Ordering Matrix</b>				
<b>Mounting</b>		<b>Socket Set</b>	<b>Shade</b>	<b>Adapter Finish</b>
[ ]		[ ]	[ ]	[ ]
Canopy Mount	<b>PLD</b>		<b>451AM</b> <b>451BL</b> <b>451WT</b>	<b>BK CH DB PT WT</b>
Canopy Mount	<b>PLD</b>		<b>451AM</b> <b>451BL</b> <b>451WT</b>	<b>BK BN WT</b>
<b>FLEXRAIL1</b>	<b>HM1</b>			<b>DB PT</b>
120v H	<b>HTK</b>			<b>BK BN WT</b>
Track L	<b>LTK</b>			<b>BK BN WT</b>
J/J2	<b>JTK</b>			<b>BK BN WT</b>

Example (Mounting-Socket Set-Shade-Adapter Finish) : PLD-F4-451AM/BN

<b>Product Details</b>		<b>Specification Features</b>
<b>Description:</b>	Linear System fixture for a incandescent lamp (F4) or a fluorescent lamp(F3).	<ul style="list-style-type: none"> <li>The length of the cord is adjustable to desired pendant height.,,</li> <li>Three color glass provided.</li> <li>5 years product warranty.</li> </ul>
<b>Materials:</b>	Steel canopy or Polycarbonate track adapter and lamp holder with a Die-cast aluminum cup.	
<b>Lamping:</b>	Use Tri-Tube GX24q 26w or 32w or 42w fluorescent lamp for F3 ; Use A or G30 incandescent lamp 100w MAX for F4 ;	
<b>Finish:</b>	Electrical plated - Brushed Nickel and Chrome; Painted in Dark Bronze, Platinum, Black and White.	
<b>Shade:</b>	Etched cased Glass.	
<b>Listing:</b>	UL & CUL Listed.	