

LINE VOLTAGE TRACK HEAD

MODEL







Catalog Information					
2-WIRE (L)	3-WIRE (H)	WIDE 2-WIRE (J)	FINISHES		
LTK-701	HTK-701	JTK-701	BK, WT		

Finish Key: BK-Black, WT-White

Product Features

- **Aiming:** 90° degrees from vertical and 356° rotational.
- Compatible: L, H, and J models in addition to fitting our own tracks are retrofitable to other manufacturers original tracks (consult factory for specific brand names).
- Special Application: The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.

615 South Street, Garden City, NY 11530

Tel: (516) 515-5000 Fax: (516) 515-5050

- Lamping: Re-lamps from the front. 4.
- Socket: Porcelain with Nickel shell.

Lamp Type	Wattage	Voltage
R 20	30W – 50W	120V
A	40W – 60W	120V
PAR 20	30W – 50W	120V

Options/Accessories

Extensions available for "H" style 3-wire series track heads only. Available in 18", 24", 36" and 48" lengths. Specify H18, H24, H36 or H48 (in BK or WT).

Material

Steel with phenolic baffle.

Listing

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



LINE VOLTAGE TRACK HEADS

MODEL

701

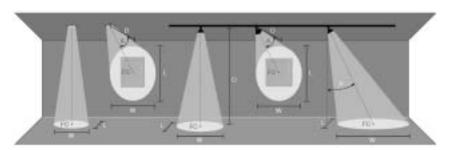

Key	In Feet			
D	Distance To Fixture From Wall Or Floor			
FC	Initial Footcandle Level At Center Of Beam			
L	Beam Length(where candlepower drops to			
	50% of maximum)			
W	Beam Width(where candlepower drops to			

50% of maximum)

CBCP Center Beam Candle Power

Lamp Beam Spread	СВСР
50W PAR20 NSP10°	6000
50W PAR20 FL25°	1500

0°Aiming Angle					30	°Aimiı	ng Ang	gl	
	D	FC	L	w	_	D	FC	L	1
	3'	667	0.5'	0.5'		3'	433	0.7'	
	5'	240	0.9'	0.9'	•	5'	156	1.2'	
	7'	122	1.2'	1.2'	•	7'	80	1.6'	
	9'	74	1.6'	1.6'		9'	48	2.1'	
	3'	167	1.3'	1.3'		3'	108	1.8'	
	5'	60	2.2'	2.2'		5'	39	3.0'	
	7'	31	3.1'	3.1'		7'	20	4.2'	
	9'	19	4.0'	4.0'		9'	12	5.4'	
		•							

45°Aiming Angle				
D	FC	L	w	
3'	236	1.1'	0.7'	
5'	85	1.8'	1.2'	
7'	43	2.5'	1.7'	
9'	26	3.2'	2.2'	
3'	59	2.8'	1.9'	
5'	21	4.7'	3.1'	
7'	11	6.5'	4.4'	
9'	7	8.4'	5.6'	

60°Aiming Angle				
D	FC	L	w	
3'	83	2.1'	1.0'	
5'	30	3.6'	1.7'	
7'	15	5.0'	2.4'	
9'	9	6.4'	3.1'	
3'	21	6.2'	2.7'	
5'	8	10.4'	4.4'	
7'	4	14.6'	6.2'	
9'	2	18.7'	8.0'	

Data based on GE PAR20 Lamps. PAR20 lamps are not sold by W.A.C Lighting