

INSTRUCTIONS: **PLD G403 Model**
Pendant Shade Installation

CAUTION

- Always turn off power at main switch prior to installation to prevent electrical shock.


TWO PIECE SHADE:

All components screw clockwise to tighten.

1. Make certain the Nord style socket is screwed fully into the aluminum cone.
2. The longer aluminum ring retains the outer shade and the short aluminum ring retains the inner shade.
3. Raise the outer shade to the level of the Nord socket so that the threaded portion protrudes through the hole. Place the leveling spring on top of the long retaining ring and screw on the socket until the shade is snug against the aluminum cone.
4. Install one plastic washer between the inner shade and long ring. Install the second plastic washer between the short retaining ring and shade.
5. Secure the inner shade by screwing the short retaining ring onto the threads of the long ring.

LAMPING:

Double glass shades accept "A" lamps only, 100 Watt max.

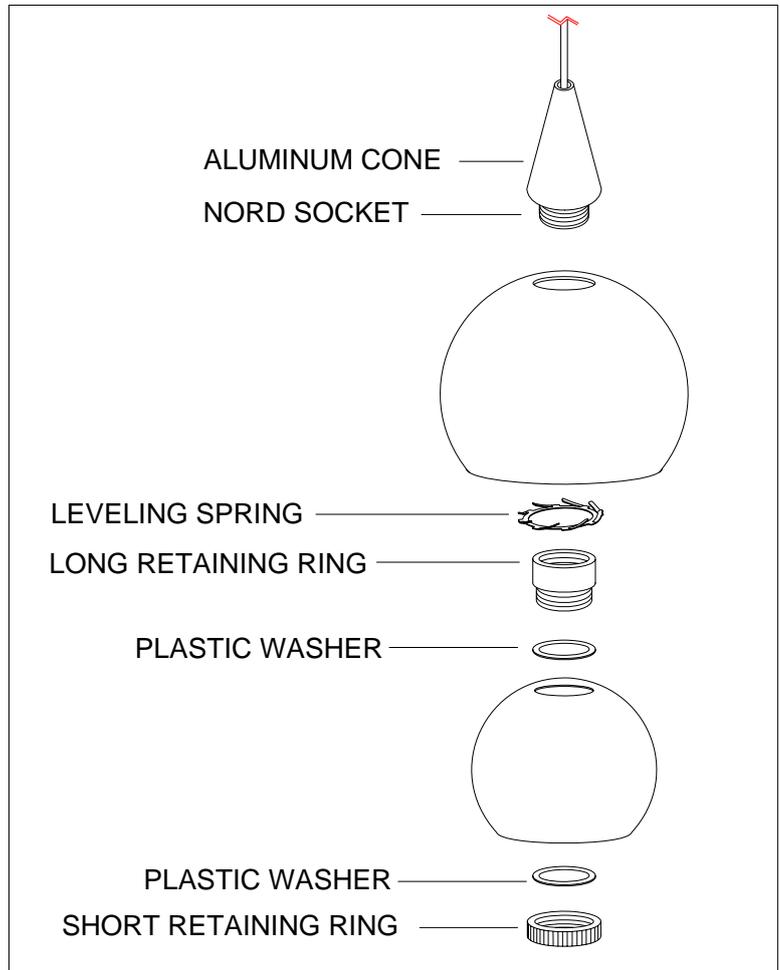

W·A·C | **LIGHTING**

www.waclighting.com

615 South Street, Garden City, NY 11530
Tel: (516) 515-5000 Fax: (516) 516-5050

168 Brea Canyon Road, City of Industry, CA 91789
Tel: (909) 468-1848 Fax: (909) 468-9958

05/21/07 Rev 1