


| | |
|-----------------------|-------------|
| CATALOG NUMBER | TYPE |
| PROJECT | |

FLEXRAIL2 – LOW VOLTAGE TRACK HEAD

SERIES HM-849

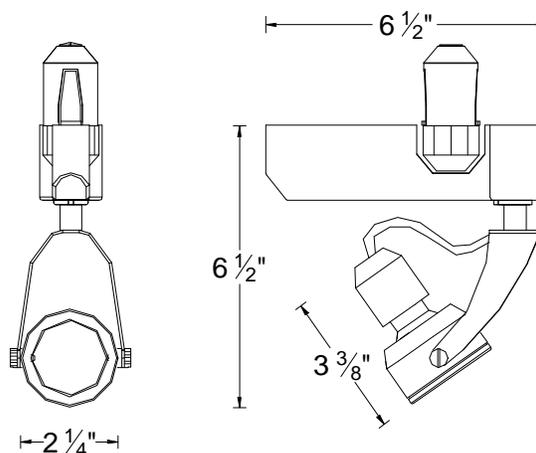

| Ordering Matrix | | | | |
|----------------------|----------------------|----------------|----------------------|----|
| Series | Model | | Finish | |
| <input type="text"/> | <input type="text"/> | | <input type="text"/> | |
| HM | 849 (50w max) | 849L (75w max) | PT | BZ |

Ordering Example (series number – model number – finish): HM-849L-PT

| Product Details | |
|---------------------|---|
| Description: | Flexrail2 compatible low voltage track head with integral electronic transformer. Available in either a 50w or 75w version. Utilizes MR16 lamps. |
| Materials: | Transformer case is molded G.E. Lexan, track assembly and head are die cast aluminum. Lamp socket is a ceramic bi-pin. |
| Transformer: | Electronic low voltage with auto-reset, soft start and short circuit protection features. Dimmable with electronic low voltage dimmers. |
| Aiming: | 350° horizontal rotation and 90° vertical aiming with integral yoke mounting feature. Locking screws assure the aiming angle is kept in place through continuous use and maintenance. |
| Lamping: | 50w MR16 maximum with HM-849 model. 75w MR16 maximum with HM-849L model. |
| Accessories: | The clear lens supplied with the 849 can be replaced with one colored lens or lens accessory. |
| Finish: | Abrasion resistant platinum or bronze paint finish. PT = Platinum metal finish BZ = Designer Bronze metal finish |
| Listing: | UL & CUL Listed. |

| Specification Features |
|---|
| <ul style="list-style-type: none"> Architectural die-cast aluminum track head with lockable aiming and modern lamping options. Both transformer case and track head assembly are painted in a matching finish. Electronic transformer soft start feature is designed to protect lamps from abrupt inrush current. The solid state circuitry promotes cool and quiet operation. 5 year product warranty. |