


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	



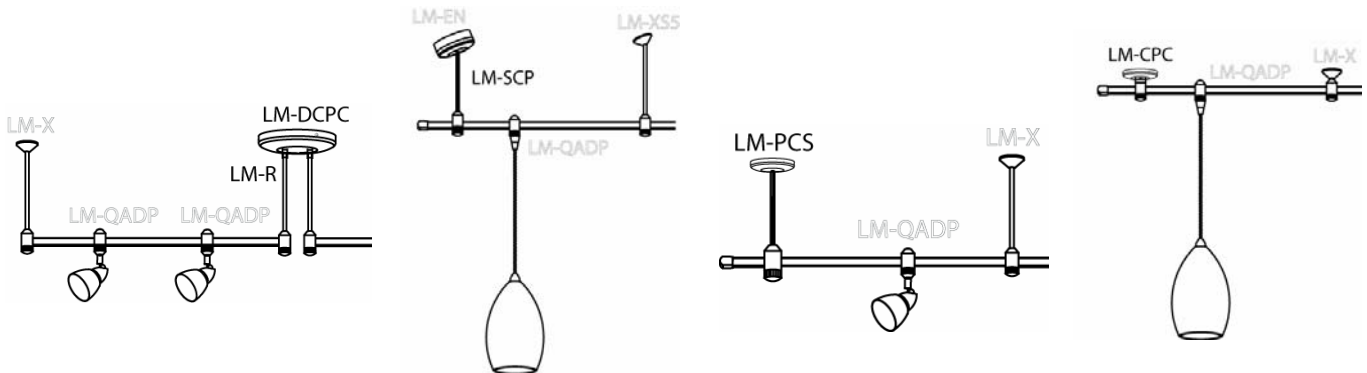

**MONORAIL - COMPONENTS**

**REMOTE POWER FEEDS**



Ordering Matrix								
Model		Part Number					Finish	
<input type="text"/>		<input type="text"/>					<input type="text"/>	
LM	CPC	DCPC	PCS (length)	SCP (length)	BZ	CH	PT	

Ordering Example (model number – part number – finish): HM-CPC-PT

Power Feeds			
Remote Power Feed Suspension:  LM-CPC-color		Dual Remote Power Feed Suspension:  LM-DCPC-color	
<b>Description</b> Rigid feed that provides power to the monorail system from a remote transformer. Standard LM-CPC height matches the LM-X3 suspension standoff height. The LM-CPC standoff height can be increased by the use of two LM-R extension rods.  4 1/2" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v monorail systems.  Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).		<b>Description</b> Rigid feed that provides power to two monorail systems from a remote transformer. The two system rails can only be connected together by using an LM-IDEC I-Connector. Standard LM-DCPC height matches the LM-X3 suspension standoff height. The LM-DCPC standoff height can be increased by the use of four LM-R extension rods.  5 1/8" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v monorail systems.  Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).	
Cable Suspension Power Feed:  LM-PCS48-color LM-PCS96-color		Sloped Ceiling Power Feed:  LM-SCP48-color LM-SCP96-color	
<b>Description</b> Flexible feed that provides power to the monorail system from a remote transformer. Can be used in flat or sloped ceiling applications. The LM-CPC length can be field shortened.  4 1/2" canopy. Designed to cover a standard junction box. 25A max. Used for either 12v or 24v monorail systems.  Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).		<b>Description</b> Flexible feed cable that provides power to the monorail system from a surface mount transformer. Can be used in flat or sloped ceiling applications. The LM-SCP length can be field shortened.  25A max. Used for either 12v or 24v monorail systems.  Available in Designer Bronze (BZ), Chrome (CH), and Platinum (PT).	