


CATALOG NUMBER	TYPE
PROJECT	

FLEXRAIL2 – LOW VOLTAGE TRACK HEAD

SERIES HM-856

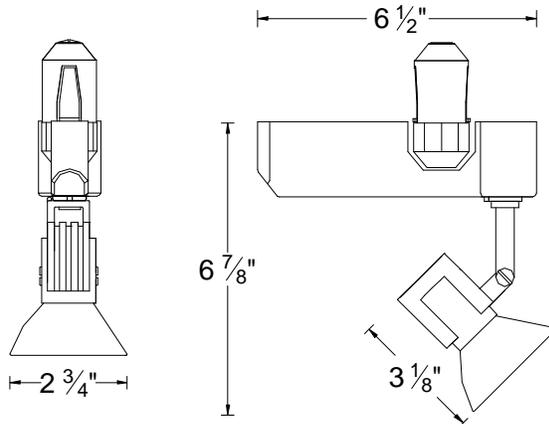

Ordering Matrix				
Series	Model			Finish
HM	856 (50w max)	856L (75w max)	PT	BZ

Ordering Example (series number – model number – finish): HM-856L-PT

Product Details		Specification Features	
Description:	Flexrail2 compatible low voltage track head with integral electronic transformer. Available in either a 50w or 75w version. Utilizes MR16G lamps.	<ul style="list-style-type: none"> Architectural die-cast aluminum track head with lockable aiming and modern lamping options. Both transformer case and track head assembly are painted in a matching finish. Electronic transformer soft start feature is designed to protect lamps from abrupt inrush current. The solid state circuitry promotes cool and quiet operation. MR16 lamps available in 7, 10, 12, 15, 20, 24, 25, 30, 36, 40 & 55 degrees to allow for a wide variety of application specific lighting patterns. 5 year product warranty. 	
Materials:	Transformer case is molded G.E. Lexan, track assembly and head are die cast aluminum. Lamp socket is a ceramic bi-pin.		
Transformer:	Electronic low voltage with auto-reset, soft start and short circuit protection features. Dimmable with electronic low voltage dimmers.		
Aiming:	350° horizontal rotation and 90° vertical aiming with yoke and pivot mounting feature. Locking screw assures the aiming angle is kept in place through continuous use and maintenance.		
Lamping:	50w MR16G maximum with HM-856 model. 75w MR16G maximum with HM-856L model. MR16G glass covered lamp must be used with this fixture.		
Accessories:	Use Lens Clip (LENS-16-CLIP) to add one specialty textured lens, colored lens, filter, or louver.		
Finish:	Abrasion resistant platinum or bronze paint finish. PT = Platinum metal finish BZ = Designer Bronze metal finish		
Listing:	UL & CUL Listed.		