
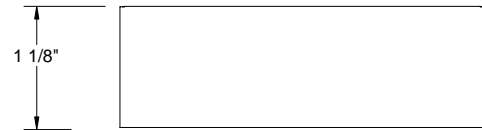


CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1260-RB2

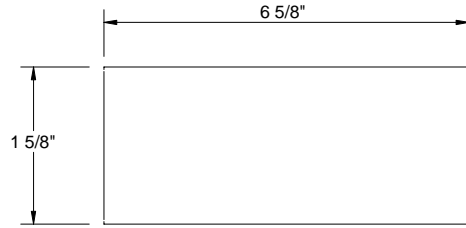

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
EN-1260-RB2	BK	<i>See table below</i>

Ordering Example (model-finish) : EN-1260-RB2-BK

Product Details	
Description:	Low Voltage Class II electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring.
Catalog Number:	EN = Advanced electronic circuitry 1260 = 12 volt , 60 watt RB = Remote Boxed, Class II AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	20W
Max Load:	60W
Max Input Amp:	0.53A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Dimming:	Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB-01 – Multiple Terminal Block

Specification Features
<ul style="list-style-type: none"> U.L. 2108 listed Class II electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. The soft start delayed start feature extends lamp life by delaying the abrupt inrush current to the lamp. Class II transformers are inherently protected and power limited, protecting the lighting system from both normal and abnormal short circuits Enclosure has knockouts on three sides. Screw holes are located on one long side for securing enclosure in place. 2 year W.A.C. Lighting product warranty.