

**Catalog Information**

**2-WIRE (L)**      **3-WIRE (H)**      **WIDE 2-WIRE (J)**      **FINISHES**



LTK-725      HTK-725      JTK-725      BK, WT

Finish Key: BK-Black, WT-White

**Product Features**

1. **Aiming:** 90° degrees from vertical and 356° rotational.
2. **Compatible:** L, H, and J models in addition to fitting our own tracks are retrofittable to other manufacturers original tracks (consult factory for specific brand names).
3. **Special Application:** The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.
4. **Lamping:** Re-lamps from the front.
5. **Socket:** Porcelain with Nickel-plated shell.

| Lamp Type | Wattage   | Voltage |
|-----------|-----------|---------|
| A         | 40W – 60W | 120V    |
| R         | 30W – 50W | 120V    |
| PAR 20    | 30W – 50W | 120V    |

**Options/Accessories**

Extensions available for "H" style 3-wire series track heads only. Available in 18", 24", 36" and 48" lengths. Specify H18, H24, H36 or H48 (in BK or WT).

**Material**

Steel

**Listing**

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



**SPECIFICATION SHEET**

**LINE VOLTAGE TRACK HEADS**

**MODEL 725**

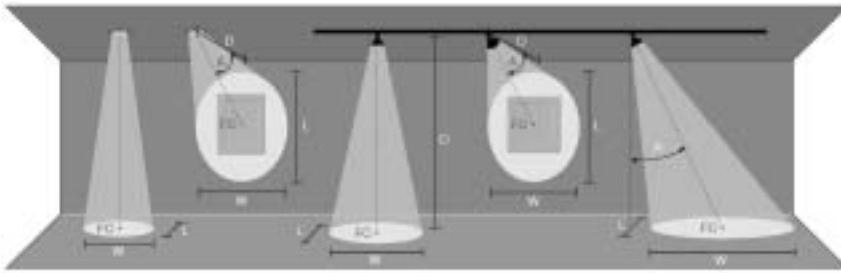

**Key** In Feet  
**D** Distance To Fixture From Wall Or Floor  
**FC** Initial Footcandle Level At Center Of Beam  
**L** Beam Length(where candlepower drops to 50% of maximum)  
**W** Beam Width(where candlepower drops to 50% of maximum)  
**CBCP** Center Beam Candle Power

| Lamp                | Beam Spread | CBCP | 0°Aiming Angle |     |      |      | 30°Aiming Angle |     |      |      | 45°Aiming Angle |     |      |      | 60°Aiming Angle |    |       |      |
|---------------------|-------------|------|----------------|-----|------|------|-----------------|-----|------|------|-----------------|-----|------|------|-----------------|----|-------|------|
|                     |             |      | D              | FC  | L    | W    | D               | FC  | L    | W    | D               | FC  | L    | W    | D               | FC | L     | W    |
| 50W PAR20<br>NSP10° |             | 6000 | 3'             | 667 | 0.5' | 0.5' | 3'              | 433 | 0.7' | 0.6' | 3'              | 236 | 1.1' | 0.7' | 3'              | 83 | 2.1'  | 1.0' |
|                     |             |      | 5'             | 240 | 0.9' | 0.9' | 5'              | 156 | 1.2' | 1.0' | 5'              | 85  | 1.8' | 1.2' | 5'              | 30 | 3.6'  | 1.7' |
|                     |             |      | 7'             | 122 | 1.2' | 1.2' | 7'              | 80  | 1.6' | 1.4' | 7'              | 43  | 2.5' | 1.7' | 7'              | 15 | 5.0'  | 2.4' |
|                     |             |      | 9'             | 74  | 1.6' | 1.6' | 9'              | 48  | 2.1' | 1.8' | 9'              | 26  | 3.2' | 2.2' | 9'              | 9  | 6.4'  | 3.1' |
| 50W PAR20<br>FL25°  |             | 1500 | 3'             | 167 | 1.3' | 1.3' | 3'              | 108 | 1.8' | 1.5' | 3'              | 59  | 2.8' | 1.9' | 3'              | 21 | 6.2'  | 2.7' |
|                     |             |      | 5'             | 60  | 2.2' | 2.2' | 5'              | 39  | 3.0' | 2.6' | 5'              | 21  | 4.7' | 3.1' | 5'              | 8  | 10.4' | 4.4' |
|                     |             |      | 7'             | 31  | 3.1' | 3.1' | 7'              | 20  | 4.2' | 3.6' | 7'              | 11  | 6.5' | 4.4' | 7'              | 4  | 14.6' | 6.2' |
|                     |             |      | 9'             | 19  | 4.0' | 4.0' | 9'              | 12  | 5.4' | 4.6' | 9'              | 7   | 8.4' | 5.6' | 9'              | 2  | 18.7' | 8.0' |

Data based on GE PAR20 Lamps.  
 PAR20 lamps are not sold by W.A.C Lighting