

Fusion Jack 2.75" Flush Canopy

CK0011-FJ2-1.1



Fusion Jack™

GENERAL PRODUCT INFORMATION:



This product is suitable for dry locations only.



Model numbers ending in “-LED” or “-LED277” can be dimmed with a low-voltage electronic dimmer, have a rated maximum output of 60 watts, and are compatible with LED elements. All other model numbers can be dimmed with a standard incandescent dimmer, have a rated maximum output of 75 watts, and are not compatible with LED elements.




Install the 2.75" Canopy

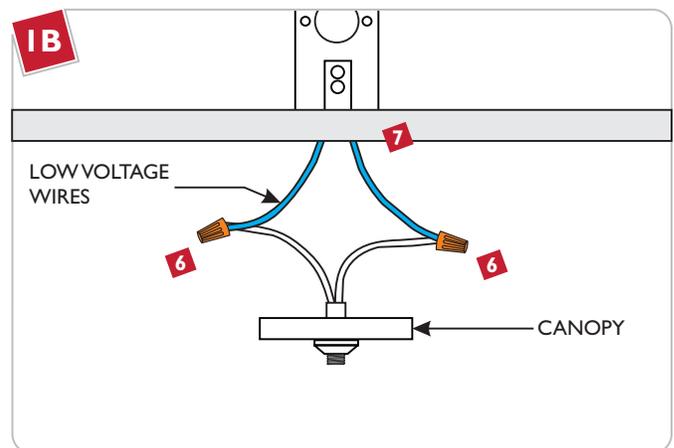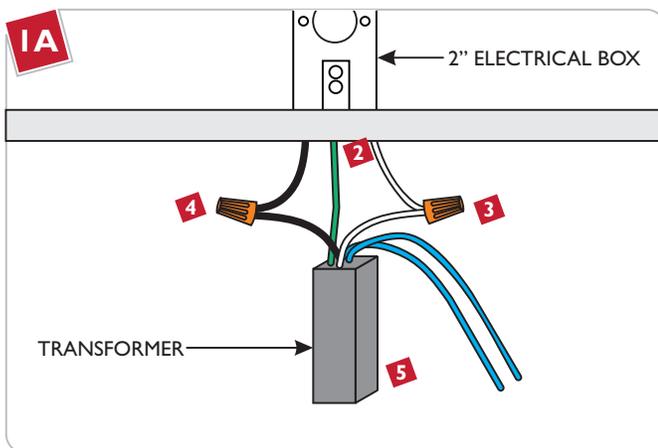


NOTE: The 2" electrical box must be installed prior to these steps. Refer to the instruction sheet provided with the electrical box.

- 1** Disconnect power to the electrical box.
- 2** Connect the green transformer wire to a suitable ground according to local electrical codes.
- 3** Connect the white transformer wire to the neutral power line wire with a wire nut.
- 4** Connect the black transformer wire to the hot power line wire with a wire nut.
- 5** Place the transformer inside the electrical box.

- 6** Connect each canopy wire to a low voltage wire with a wire nut.
- 7** Place all wire and wire nut connections properly inside the electrical box.

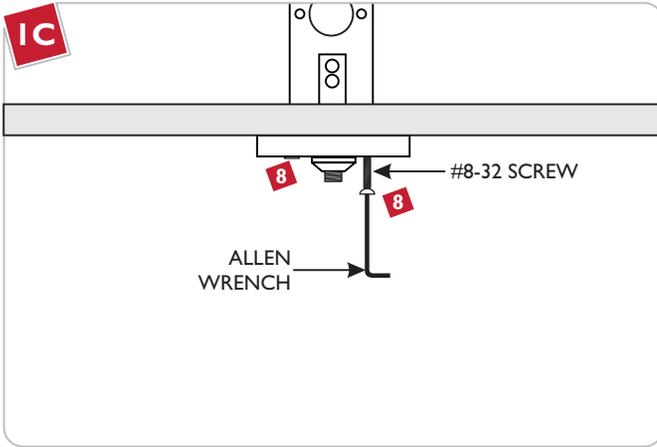

- 8** Mount the canopy to the electrical box with the two #8-32 screws using the provided 3/32 Allen wrench.

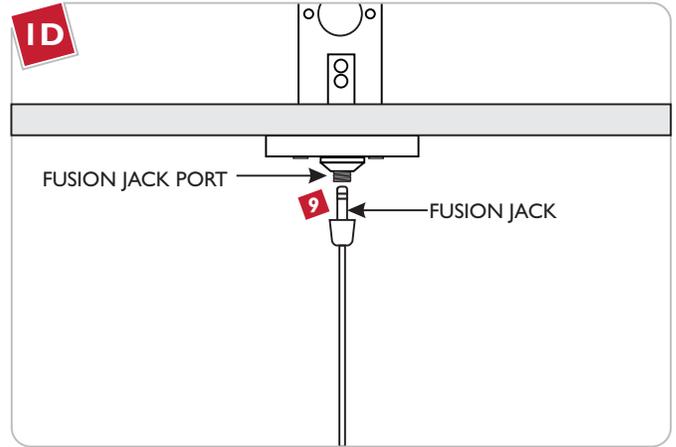

- 9** Screw the Fusion Jack into the Fusion Jack port.
- 10** Turn the power on.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077

800.323.3226 - 847.626.6300

www.lblighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company