# Nikko (18 Watt Compact Fluorescent)

148\_HE, 149\_HE, 159\_HE 1.0




#### GENERAL PRODUCT INFORMATION:

This product is suitable for wet locations.


This instruction shows a typical installation.



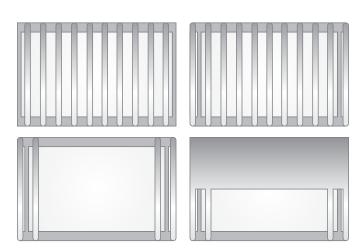


CAUTION - RISK OF FIRE This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWERTO THE ELECTRICAL BOX.


### **Install the Fixture**

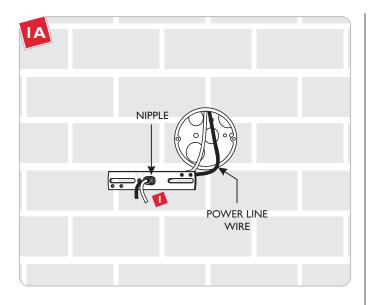


**1** Feed the power line wires through the crossbar nipple.

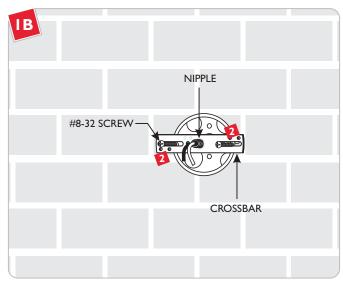


Attach the crossbar to the electrical box using two #8-32 screws provided.

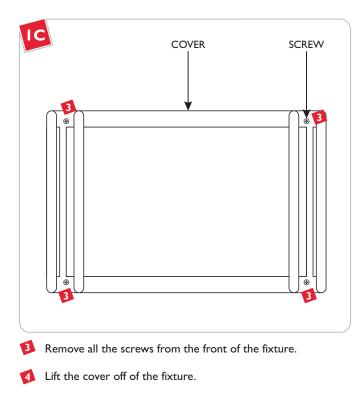


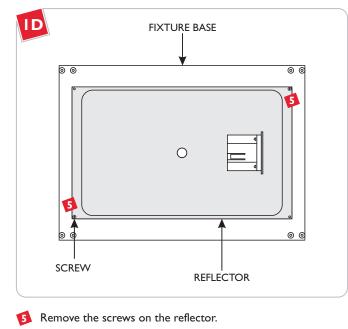

Lift the reflector out of the fixture base.

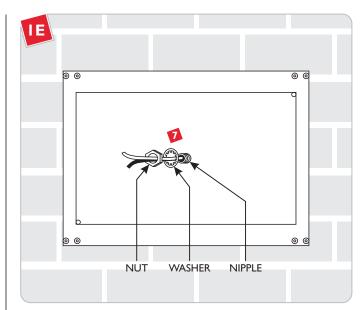


Make sure the fixture base is level, and secure it to the nipple with a lock washer and nut.

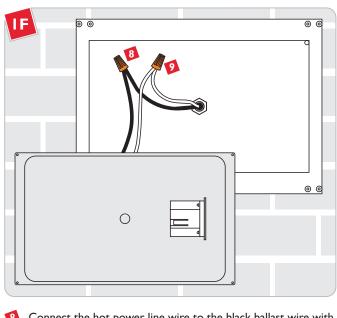

- Connect the hot power line wire to the black ballast wire with a wire nut.
- Onnect the neutral power line wire to the white ballast wire with a wire nut.
- Connect the fixture to a suitable ground according to local electrical codes.
- **1** Reattach the reflector to the fixture base.


### Install the Lamp and Cover

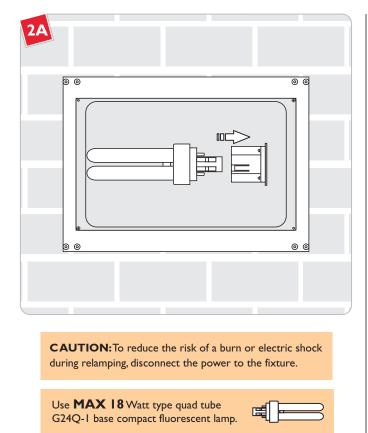

Push the lamp base into the socket.

Before continuing, turn on power to the fixture to verify all connections are good.

If installing in a wet location, caulk around the base with waterproof construction sealant.

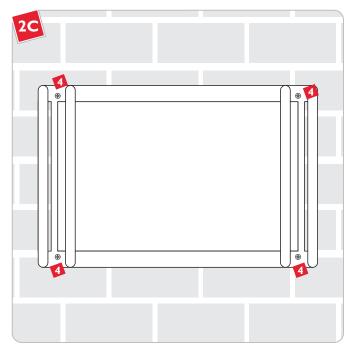

Replace the cover and reattach the screws to secure the cover to the fixture.

## **SAVE THESE INSTRUCTIONS!**



#### www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting, LBL Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company