Large Bulk Head (Metal Halide)

516_C50MH, 517_C50MH 1.0




GENERAL PRODUCT INFORMATION:


This product is suitable for wet locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWERTO THE ELECTRICAL BOX.

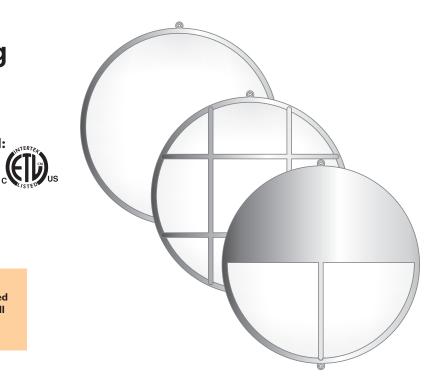


Install the Fixture

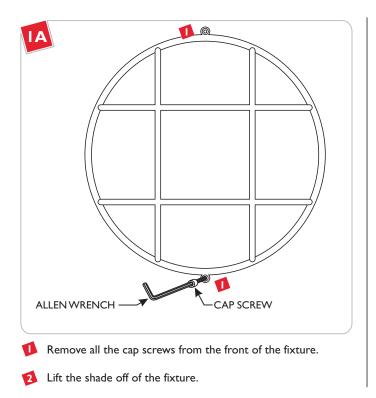




Attach the crossbar to the electrical box using the two #8-32 screws provided.


Loosen or tighten the crossbar nipple so it protrudes 1.5" from the crossbar.

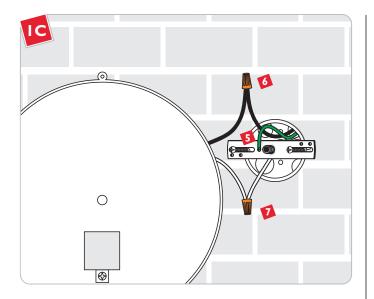

- S Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- Connect the white fixture wire to the neutral power line wire with a wire nut.

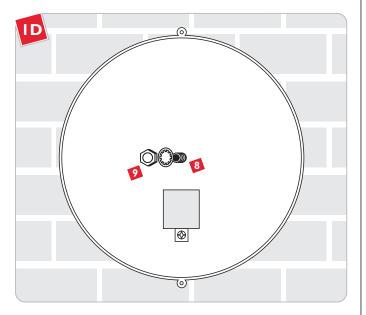

- 8 Slip the hole in the center of the fixture onto the nipple.
- Make sure the fixture is level, and secure the fixture to the nipple with a lock washer and nut.




CAUTION:To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.


Use **MAX 50 Watt** Type E26 Medium Base Metal Halide Lamp.



- 5 Screw the lamp completely into the socket.
- Before continuing, turn on power to the fixture to verify all connections are good.

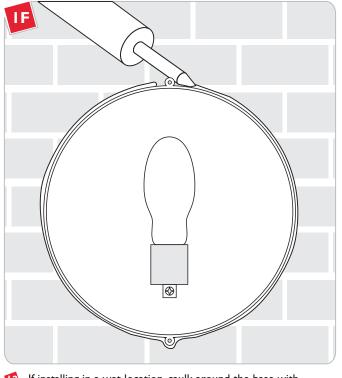

If installing in a wet location, caulk around the base with waterproof construction sealant.

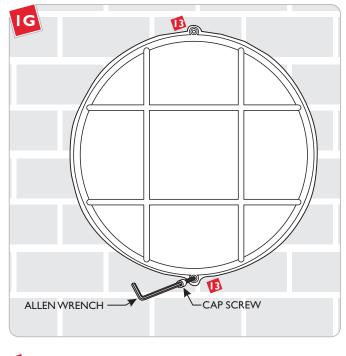

Replace the shade and tighten the cap screws to secure the shade to the fixture.

SAVE THESE INSTRUCTIONS!



www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting, LBL Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company