



GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.


This product can be dimmed with a standard incandescent dimmer.




CAUTION - RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**



Assemble the Fixture

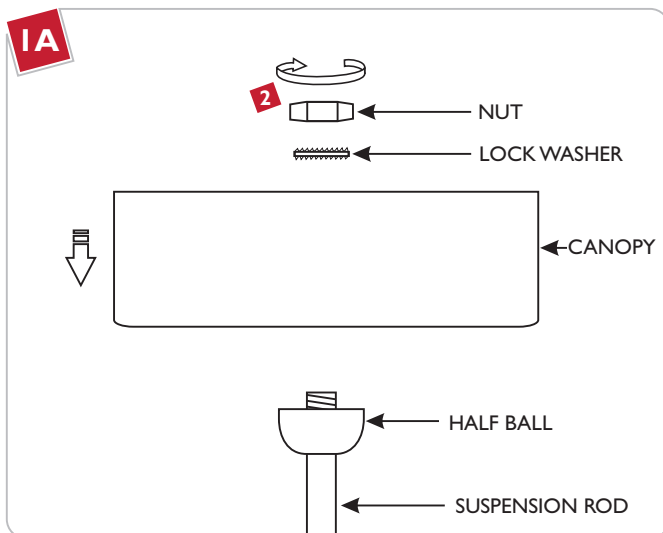


1 Attach the canopy to the suspension rod by placing it on the half ball and securing it with the lock washer and nut.

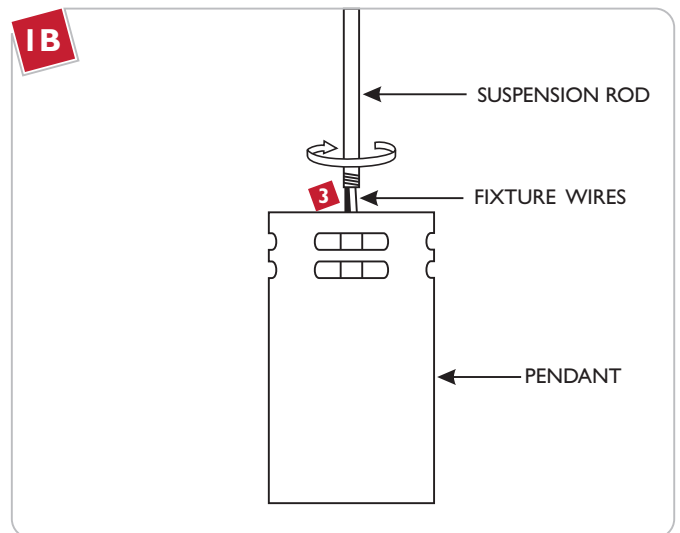


3 Feed the fixture wires through the suspension rod and screw the suspension rod into the pendant.


Install the Fixture

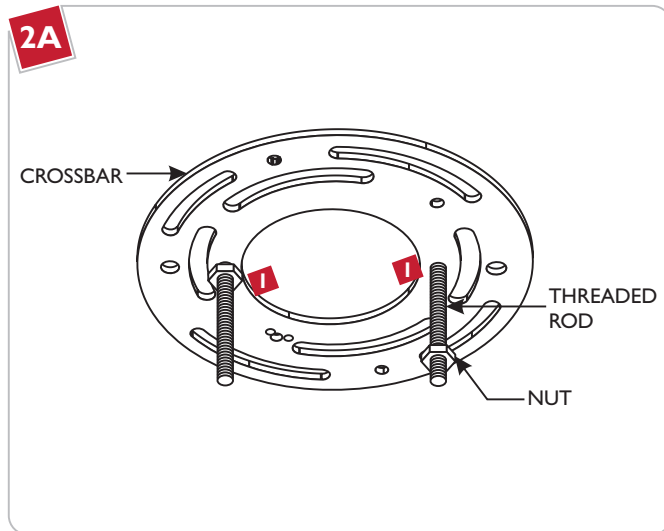


1 Screw one nut onto each threaded rod and tighten it to secure the threaded rod in place.

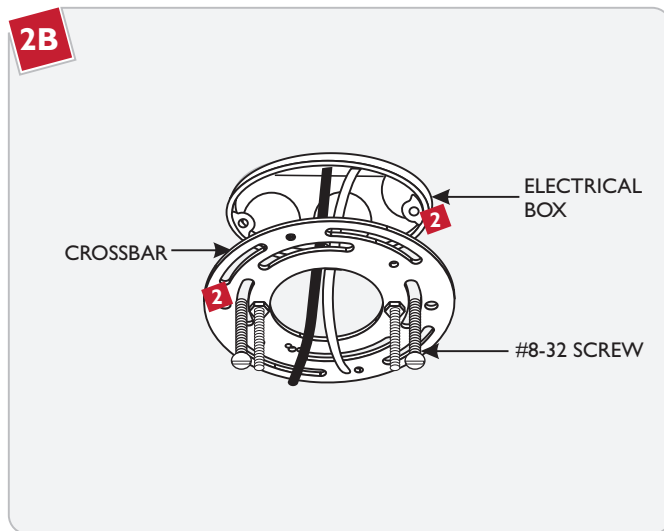

2 Mount the crossbar to the electrical box with two #8-32 screws.

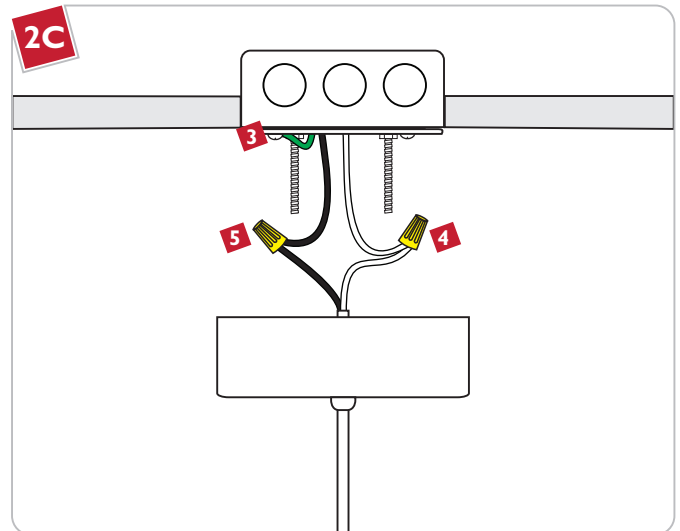


- 3** Connect the crossbar ground wire to a suitable ground in accordance with local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.

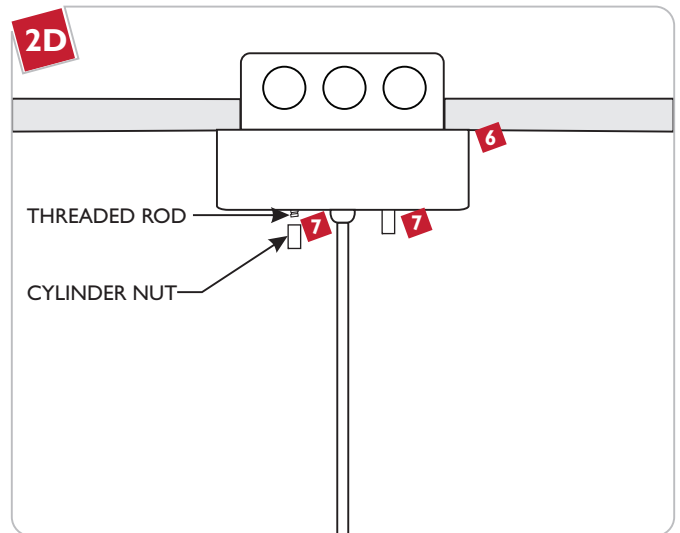

- 6** Place all wires and wire nut connections properly inside the canopy housing.
- 7** Slide the canopy onto the threaded rods and secure it in place by tightening the cylinder nuts completely to the threaded rods.

Install the Lamp

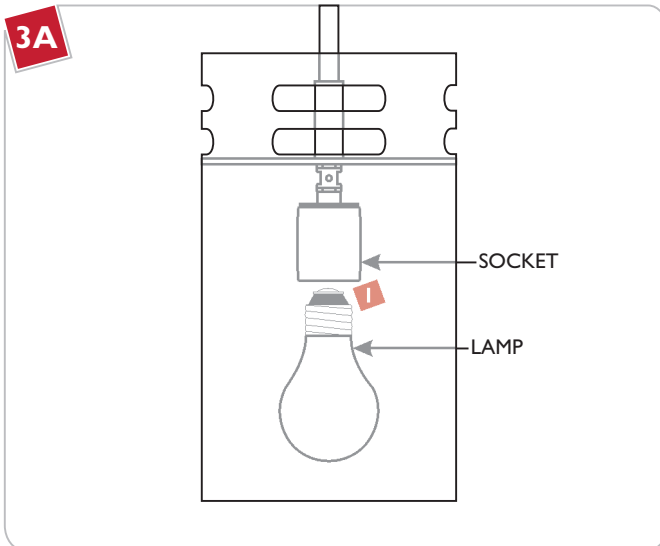

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

Use **MAX** 120 Volt, **75** Watt Type A19 Medium Base Lamp.



1 Screw the lamp completely into the socket.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077

800.323.3226 - 847.626.6300

www.lblighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company