

SPECIFICATIONS

Flow Rate

SOUTH SEA™ TWO HANDLE MINI-WIDESPREAD LAVATORY FAUCET

Model

D303045 (Replaces D309245 series)

Description

- Ceramic disc valve
- 3" high spout, 4 1/4" spout length
- Metal touch down drain assembly
- 3 hole mount

Standards




- UPC/cUPC
- NSF 61-9
- Energy policy act of 1992



• ASME A112.18.1



• CSA B125



Meets CA AB-1953



 ADA Accessibility Guidelines for Buildings and Facilities -4.27.4 Controls and Mechanisms

20 40 60 80 PSI 20 40 FSI Certified by HAPMO R&T




Finishes Available

- Brushed Nickel (BN)
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

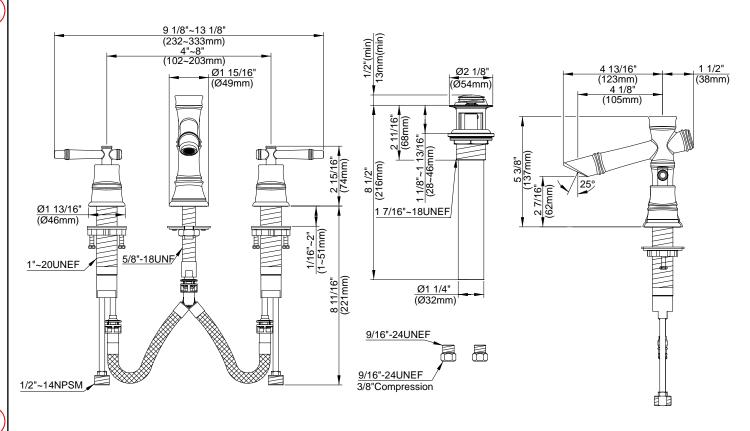

Submittal Information:		
Job Name:	Location:	
Contractor:	Contact #:	