



**BARRIER FREE**

**STALLBROOK URINAL**

- Vitreous china
- Sloping front stall urinal
- Low-consumption (3.8 Lpf/1.0 gpf)
- Integral flush spreader
- Washout flush action
- 3/4" inlet spud
- Fixture only
- Meets ANSI flush requirements of 0.7 to 1.0 GPF

**6400.014 Top Spud**

Nominal Dimensions:  
457 x 381 x 965mm (18" x 15" x 38")

Recommended working pressure - between  
20 psi at valve when flushing and 80 psi static.

**Compliance Certifications -  
Meets or Exceeds the Following Specifications:**

- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions




To Be Specified

- Color:  White  Bone  Silver
- Flush Valve: Sloan Royal 186-1 (see note)
- Alternative Flush Valve:
- Strainer (suggest McGuire #1233 or equivalent):



**NOTE:** Electronic Flush Valve required to meet ADA Flush Valve Height Requirement. **MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

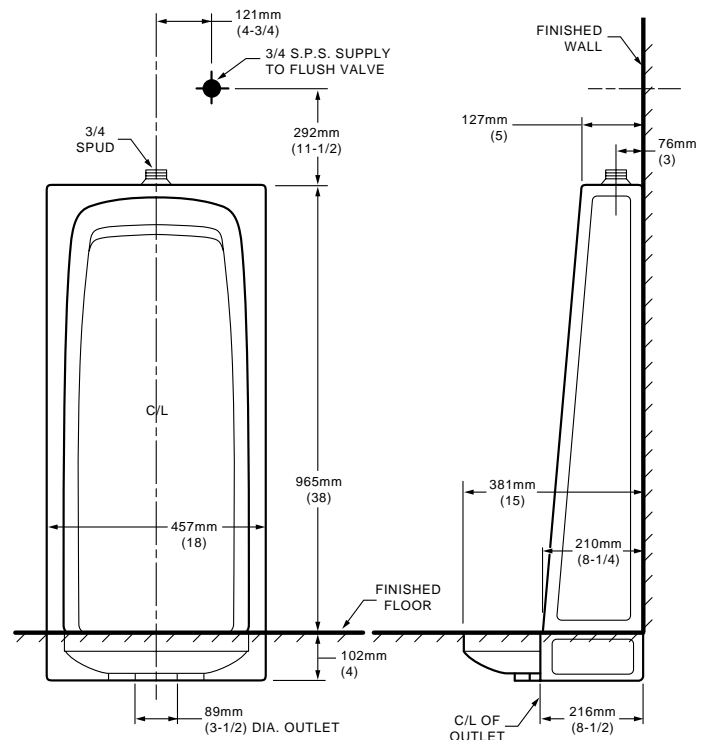

**NOTES:**  
FLUSH VALVE NOT INCLUDED AND MUST BE ORDERED SEPARATELY.  
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.  
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**SPS 6400**