

American Standard


CULINAIRE™

**SINGLE CONTROL KITCHEN FAUCET
with PULL DOWN SPRAY**

MODEL NUMBER:

▣ **4147.300 Pull Down Faucet**

Brass body with pull down spray. Escutcheon plate (installation is optional).

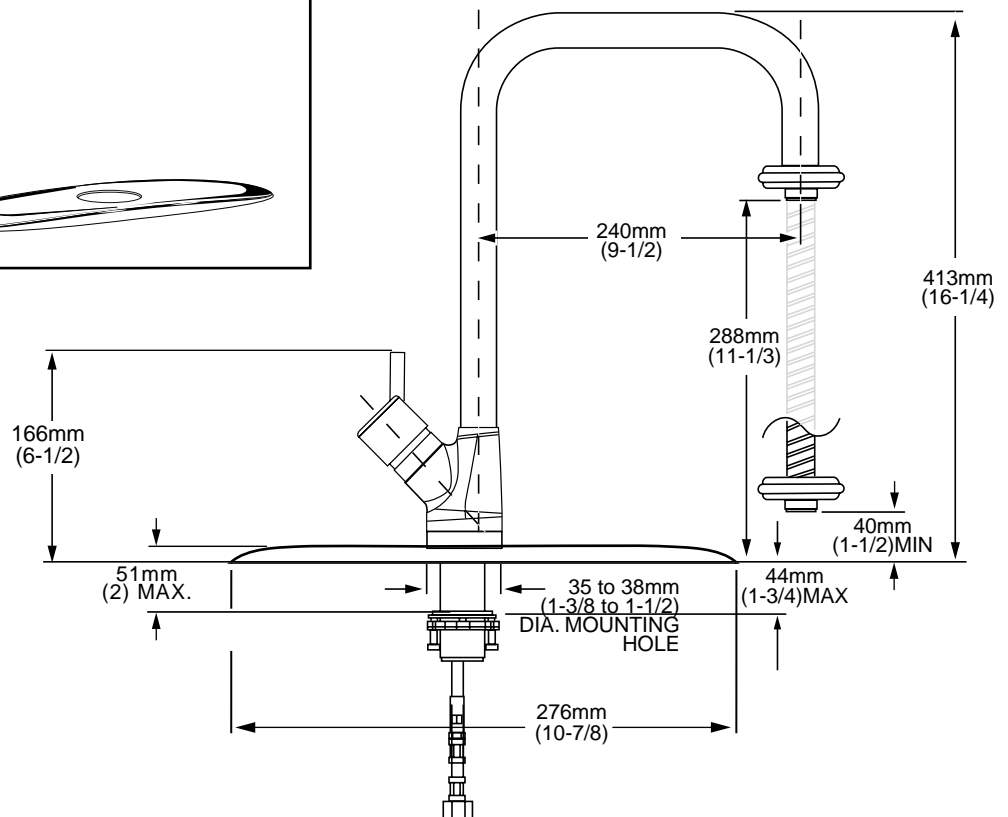

GENERAL DESCRIPTION:

Forged brass body with brass swing spout and stamped brass escutcheon. Auto-retracting pull-down swing spray spout. Washerless 35mm ceramic disc valve cartridge with hot limit safety stop. 3/8" O.D. copper supplies with 1/2" male threaded adaptors and nuts. 2.2 gpm/8.3L/min. maximum flow rate. Fitting can be mounted with or without supplied escutcheon plate (escutcheon size 10-7/8"L x 2-1/2"W x 9/16"H). Faucet can be right or left hand mounted.

PRODUCT FEATURES:

Brass and Copper Waterway: Highest quality materials for durability & long life.

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Memory Position Valving: Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Pull-down Spray: Easy grip operates with just 2 fingers. Simplifies even the most difficult cleaning tasks.

Larger Spout: Increased height, reach and diameter.

Choice of Finishes: Wide range of durable finishes.

SUGGESTED SPECIFICATION:


Single control kitchen combi faucet shall feature a forged brass body with pull-down spray. Shall also feature washerless ceramic disc valve cartridge. Fitting shall be American Standard Model # 4147.300.____

SINGLE CONTROL KITCHEN with PULL DOWN SPRAY FAUCET


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
NSF 61/Section 9
CSA B125

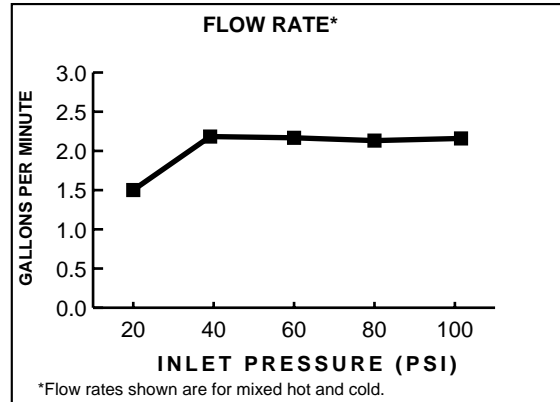

Product Number	Description	Finish Options					
		Polished Chrome	PVD Blackened Bronze	PVD Stainless Steel	PVD Polished Brass	White Heat	PVD Satin
		002	068	075	099	208	295
4147.300	Hi flow faucet with pull down spray and hose. 3/8" copper inlets with 1/2" male threaded connectors and nuts.						

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.