




MODEL NUMBER:*

- ☐ **5500.174 Centerset Lavatory**
0.35 gpm Pressure Compensating, Vandal-Resistant Non-Aerated Spray. Vandal-Resistant Wrist Blade handles. Less drain and pop-up hole.

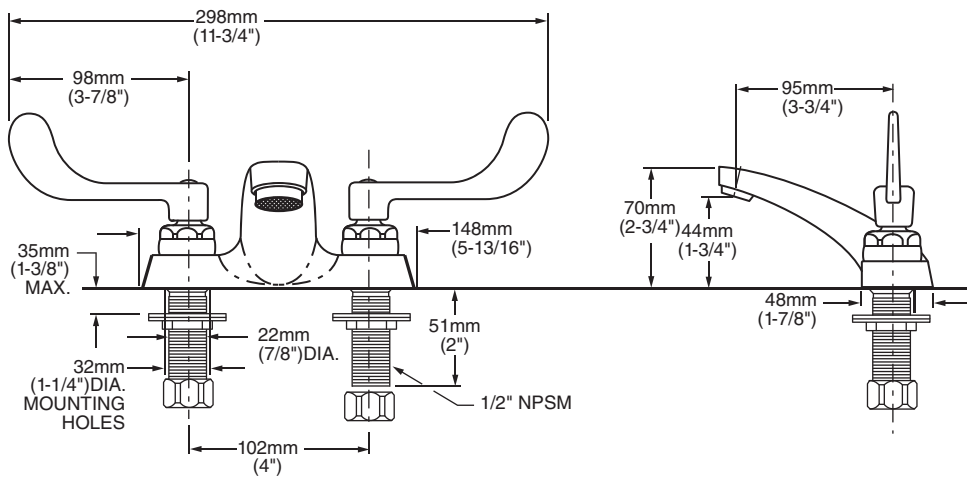

GENERAL DESCRIPTION:

Durable cast brass construction throughout. 1/2" male threaded inlet shanks with brass shank nuts and coupling nuts. 1/4 turn ceramic disc valve cartridges. Vandal-Resistant Wrist Blade handles with blue & red color indexes. 0.35 gpm/1.3L/min. maximum flow rate.

PRODUCT FEATURES:

- Meets CALGreen:** 0.35 gpm/1.3 L/min. flow rate
- Pressure Compensating Spray:** Provides a constant water flow of 0.35 gpm/1.3L/min. gpm throughout the pressure range
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION:

4" centerpiece lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving, pressure compensating vandal-resistant 0.35 gpm/1.3L/min. non-aerated spray. Vandal-Resistant wrist blade handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 5500.174.002.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 and Annex G**
- CALGreen**

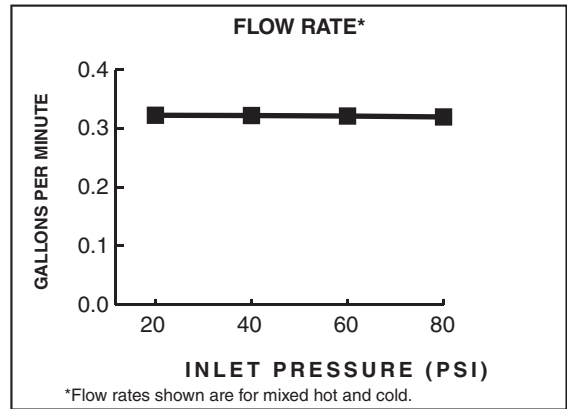

Product Number	Description	Finish
		Polished Chrome
5500.174	Centerset Lavatory. 0.35 gpm/1.3L/min. pressure compensating vandal-resistant non-aerated spray. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	002

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES