

Duomo Series H7313/H8413

Features

Classic pendant mount fixture is available in two diameters, and two finishes. Product can be used in various applications including corridors, and public spaces, for ceiling applications. This pendant comes standard with 120" of power cord and a 36" chain. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Decorative ring is spun from .040" steel. Glass diffuser is retained with 3 clips. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Back plate is finished in lighting grade white baked gloss enamel paint. Decorative spun ring is finished in plated brushed nickel or applied oil-rubbed bronze.

Diffuser

Glass diffuser is .200" thick molded frosted white on white swirl glass.

Electrical

This unit is wired with a line voltage GU24 base socket for 13 watt self-ballasted spring lamps; 120V/60Hz AC operation.

Lamping

For use with 13 watt self-ballasted 2700K spring lamps; included.

Certification


All fixtures are cULus listed for damp locations.

Options

18 or 26 watt lamping
120-277V HPF
Dimming
Custom finishes
ENERGY STAR qualified

Specifications and dimensions
subject to change without notice.

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

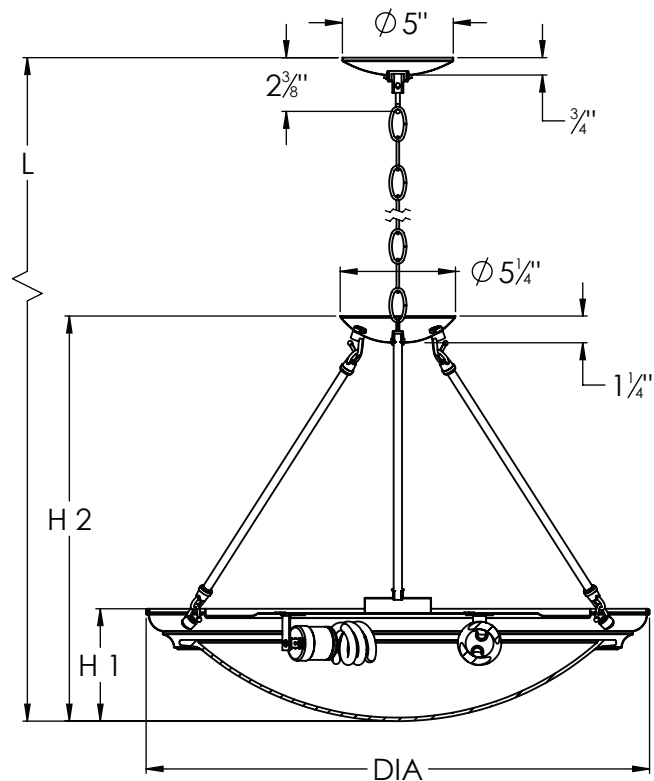

Ordering Information:

Model No.		Lamps		Dimensions			
Finish	120V	Qty	Lamp	L	H1	H2	DIA
Brushed Nickel	H7313BNSCT	3	13W MAX GU24 SELF-BALLAST CFL	19-5/8"	5-1/8"	13-1/8"	22-3/4"
Brushed Nickel	H8413BNSCT	4	13W MAX GU24 SELF-BALLAST CFL	21-1/2"	7-1/4"	13-1/2"	27-7/8"
Finish	120V	Qty	Lamp	L	H1	H2	DIA
Oil-Rubbed Bronze	H7313RBSCT	3	13W MAX GU24 SELF-BALLAST CFL	19-5/8"	5-1/8"	13-1/8"	22-3/4"
Oil-Rubbed Bronze	H8413RBSCT	4	13W MAX GU24 SELF-BALLAST CFL	21-1/2"	7-1/4"	13-1/2"	27-7/8"