

**Restoration Series
REV318/418**

| | | |
|-------------------|------------|----------------------|
| Project _____ | | Fixture Type _____ |
| Location _____ | | Quantity _____ |
| Approved By _____ | Date _____ | Catalog Number _____ |

Features

Clean and classic styling is featured with this transitional wall mount vanity. Fixture offers decorative cast metal frame with an acrylic bottom and open top for indirect lighting. Each individual shade is frosted white slumped glass and offered in a 3 or 4 light option. Fixture mounts horizontally to standard junction box (not included). Offset J-box mounting is possible (consult factory).



Construction

The mounting plate and back pan are die-formed of 22-gauge steel. Decorative frame is die-cast aluminum. Product is provided with standard mounting holes and wiring access.

Finish

The mounting plate is galvanized steel and the back plate and die-cast frame is applied oil-rubbed bronze finish.

Diffuser

Each shade is .156" thick-slumped frosted white glass and is individually mounted to the back pan by thumb screws. The .040" matte white acrylic bottom diffuser is retained to the back plate with 2 screws.

Electrical

This fixture is wired with a line voltage socket for 18 watt self-ballasted spring lamps GU24 base, 120V/60Hz AC operation.

Lamping

For use with 18 watt self-ballasted 2700K spring lamps, included.


Certification

All fixtures are cULus listed for damp locations.

Options (consult factory)

- Dimming
- 13 watt lamping
- Custom finishes
- ENERGY STAR qualified

Specifications and dimensions
subject to change without notice.

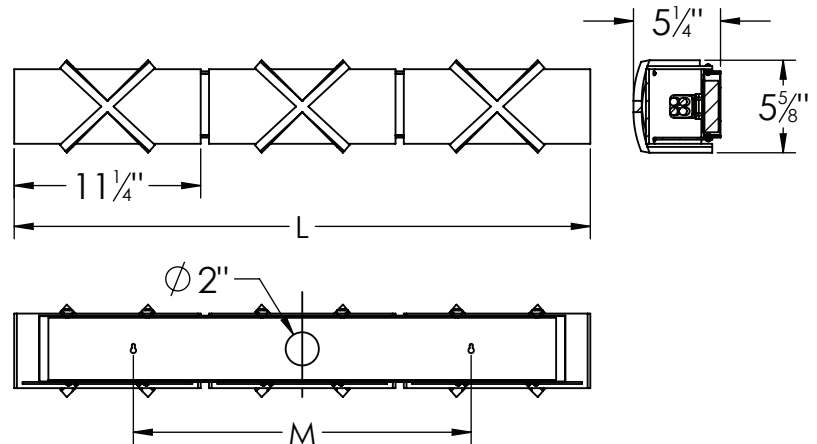

Ordering Information:

| Model No. | | Lamps | | Dimensions | | | Mounting |
|-------------------|-------------|-------|-------------------------------|------------|---------|--------|----------|
| Finish | 120V | Qty | Lamp | H | L | D | M |
| Oil-Rubbed Bronze | REV318RBSCT | 3 | 18W MAX GU24 SELF-BALLAST CFL | 5-5/8" | 34-3/4" | 5-1/4" | 20-5/8" |
| Oil-Rubbed Bronze | REV418RBSCT | 4 | 18W MAX GU24 SELF-BALLAST CFL | 5-5/8" | 46-1/2" | 5-1/4" | 43-1/4" |