

**Carson Series
CRC155**

Features

This transitional close-to-ceiling fixture includes a honey onyx diffuser with decorative bronze trim detail and is available in a 16" diameter. This product is only 5.75" deep and can be used in corridors, elevator lobbies and entryways. Fixture mounts to standard junction box (not included).

Construction

The canopy and back pan is 20-gauge steel. The decorative cross band is 18-gauge steel. Standard mounting gem bar and hardware is included. Power supply connections must be made in the junction box. Canopy is mounted to the junction box with thumb nuts.

Finish

The canopy and decorative cross bands are finished in an applied oil-rubbed bronze with a clear topcoat.

Diffuser

The 16" diameter is vacuum formed from .125" thick matte honey onyx acrylic. Diffuser and cross band assembly mount to fixture housing with center hang-straight.

Electrical

This unit can be ordered in the following options: with UL listed instant-start, electronic normal power factor ballast; 120V 60Hz AC. 120-277V Universal 50/60Hz AC (MV suffix).

Lamping

For use with 1/40 watt 3000K T5 circline lamp included.

Certification


All fixtures are cULus listed for damp locations.

Options (consult factory)

Custom finish
120/277V 40 watt T5 circline lamping

Specifications and dimensions
subject to change without notice.

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

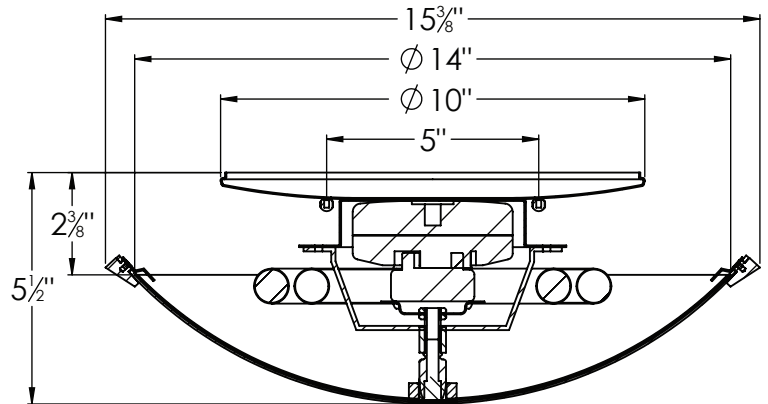

Ordering Information:

Model No.		Lamps		Dimensions		
Finish	120V	120-277V	Qty	Lamp	H	DIA
Oil-Rubbed Bronze	CRC155RBE6T		1	55W 2C CIRCLINE	5-1/2"	15-3/8"
Oil-Rubbed Bronze		CRC155RBMVT	1	55W T5 CIRCLINE	5-1/2"	15-3/8"