

**Nolan Series**  
**NLV214/221/228**

**Features**

Transitional glass-in-glass styling is featured with this wall mount vanity that is ADA compliant. Fixture has full back plate and die-cast epaulet in an oakley plated bronze finish. Product can be mounted vertically or horizontally with power supply connections made inside a standard junction box. Offset J-box mounting is possible (consult factory).

**Construction**

Housing is die-formed of 20-gauge steel. Epaulet is .060" gauge die-cast aluminum. End plates are 18-gauge stamped steel.

**Finish**

Back plate and epaulet is finished in a plated oakley bronze finish.

**Diffuser**

Outer diffuser is .100" thick clear-slumped glass and inner diffuser is .100" white frosted acrylic. Decorative epaulets are fastened to the diffuser and the assembly attaches to the fixture back plate.

**Electrical**

This unit is wired with UL listed electronic high power factor program start ballast for two T5 lamps at 120-277V 50/60 Hz AC operation.

**Lamping**

For use with 2 T5 linear fluorescent lamps; supplied by others.

**Certification**

All fixtures are cULus listed for damp locations.


**Options (consult factory)**

Emergency battery backup  
Dimming

For photometric information, consult factory.

Specifications and dimensions  
subject to change without notice.

|             |      |                |
|-------------|------|----------------|
| Project     |      | Fixture Type   |
| Location    |      | Quantity       |
| Approved By | Date | Catalog Number |

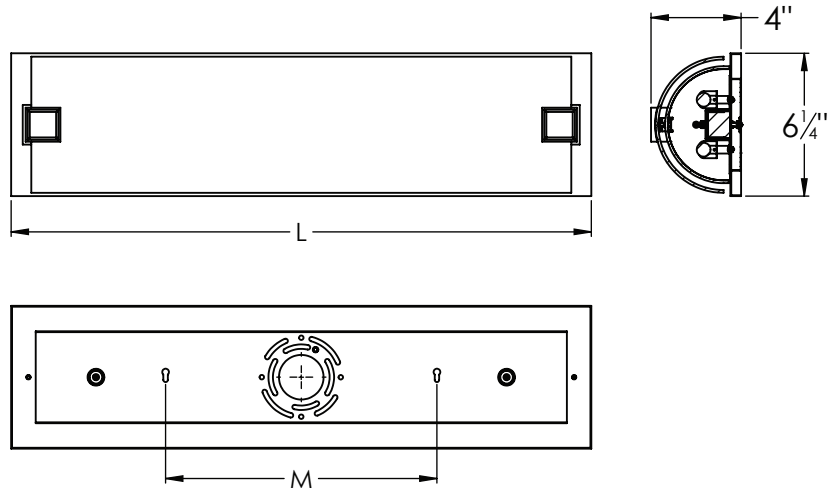

**Ordering Information:**

| Model No.     | 120-277V   | Lamps |       | Dimensions |         |    | Mounting |
|---------------|------------|-------|-------|------------|---------|----|----------|
|               |            | Qty   | Lamp  | H          | L       | D  | M        |
| Oakley Bronze | NLV214RBMV | 2     | F14T5 | 6-1/4"     | 25-3/4" | 4" | 15-3/4"  |
| Oakley Bronze | NLV221RBMV | 2     | F21T5 | 6-1/4"     | 37-3/4" | 4" | 27-3/4"  |
| Oakley Bronze | NLV228RBMV | 2     | F28T5 | 6-1/4"     | 49-3/4" | 4" | 39-3/4"  |