

**Curved Profile Wall Bracket
ASP115/117/125/132**

| | | |
|-------------|------|----------------|
| Project | | Fixture Type |
| Location | | Quantity |
| Approved By | Date | Catalog Number |

Features

Economy 1 light T8 wall bracket has a curved front and can be mounted vertically or horizontally. Product includes chrome end caps, bright aluminum body, grounded convenience outlet and rotary turn switch located in the right end cap. Diffuser is extruded white acrylic with ribbed linear prisms. Tools are not required for lamp replacement. Power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.



Construction

The housing is die formed from 22-gauge aluminum and is provided with standard mounting holes and wiring access. Ends are die-formed 20-gauge steel.

Finish

Housing is finished in bright anodized aluminum. Ends are anodized aluminum finish.

Diffuser

Diffuser is .100" extruded white acrylic with ribbed linear prisms located on the outside. Diffuser is retained by the end caps and secured by two acorn nuts.

Electrical

This unit is wired with UL listed electronic normal power factor instant start ballast for one T8 lamps at 120V 60 Hz AC operation.

Lamping

For use with 1 T8 linear fluorescent lamps; supplied by others.

Certification


All fixtures are cULus listed for damp locations.

Options (consult factory)

- Less convenience outlet
- Less rotary switch

For photometric information, consult factory.

Specifications and dimensions
subject to change without notice.

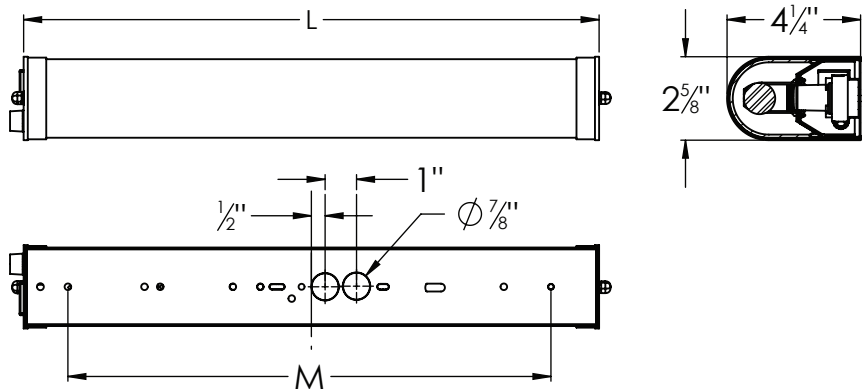

Ordering Information:

| Model No. | Lamps | | Dimensions | | | Mounting | |
|--------------------------|-------|-----|------------|--------|---------|----------|---------|
| | 120V | Qty | Lamp | H | L | | D |
| Bright Aluminum ASP115R8 | | 1 | F15T8 | 2-5/8" | 18-3/8" | 4-1/4" | 15-1/2" |
| Bright Aluminum ASP117R8 | | 1 | F17T8 | 2-5/8" | 24-3/8" | 4-1/4" | 21-1/2" |
| Bright Aluminum ASP125R8 | | 1 | F25T8 | 2-5/8" | 36-3/8" | 4-1/4" | 30-3/4" |
| Bright Aluminum ASP132R8 | | 1 | F32T8 | 2-5/8" | 48-3/8" | 4-1/4" | 42-3/4" |