

**Delta Series
DEP126**

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

Features

This simple style with elegant geometry features glass and a cast metal frame. The mono-point pendant is 17 1/2" tall and includes a 8 foot clear adjustable cord with a twist lock strain relief for easy adjustment. Glass can be raised for easy relamping and has an open bottom. Product can be used over reception desks, restaurants, and in public spaces.

Construction

Glass is mounted into a die cast fitter. Both are supported with an internal 18 gauge steel web. Canopy is 5 1/2" in diameter and fits over a standard junction box and is retained with two screws. Power supply connections must be made inside a junction box (not included). Canopy mounts to standard junction box (not included).

Finish

All exposed metal parts are plated satin nickel with a clear lacquer topcoat.

Diffuser

Diffuser is .090" thick frosted hand blown case glass.

Electrical

This unit is wired with a UL listed electronic normal power factor socket ballast for 120V/60 Hz AC operation.

Lamping

For use with 1-26 watt compact fluorescent 4 pin quad lamp; not included.

Certification


All fixtures are cULus listed for damp locations.

Options

- 1-18 watt compact fluorescent 4 pin quad lamp
- 20 watt self ballasted dimmable GU24 base fluorescent lamp
- Stem mounting
- ENERGY STAR qualified when ordered with 120V ballast and lamp

For photometric information, consult factory.

**Specifications and dimensions
subject to change without notice.**

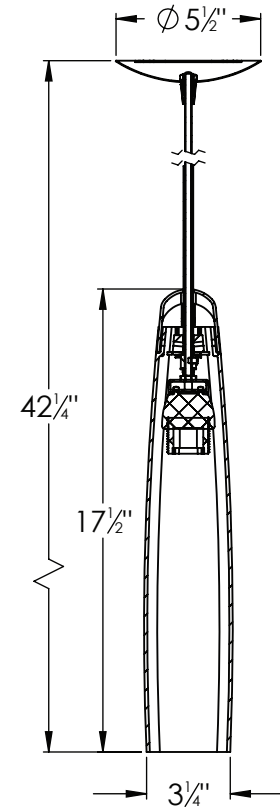

Ordering Information:

Model No.	Finish	Lamps		Dimensions		
		Qty	Type	H	W	L
DEP126SNEC	Satin Nickel	1	26W CFQ 4 PIN	17-1/2"	3-1/4"	ADJ