

## Trillium Series TRS213

### Features

Half cylinder triple banded wall mount sconce is ADA compliant and offers high quality decorative extruded aluminum bands. Open top and bottom for wall wash effect. Fixture mounts to standard junction box (not included).

### Construction

Back plate is die-formed of 22-gauge steel. Decorative bands are .060 extruded aluminum with an apparent thickness of .100" that are screwed to a 22-gauge back plate. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

### Finish

Back plate and bands are finished in satin nickel, oil rubbed bronze, and satin brass.

### Diffuser

Diffuser is .100" thick matte white extruded acrylic lens that installs from the top and slides into position. Allow 13" between top of fixture and any obstruction for diffuser installation.

### Electrical

This unit can be ordered in the following options: with UL listed programmed-start, electronic normal power factor ballast; 120-277V Universal 50/60Hz AC (MV suffix).

### Lamping

For use with 2-13 watt compact fluorescent 4-pin quad lamps; supplied by others.

### Certification

All fixtures are cULus listed for damp locations.



### Options (consult factory)

2-18 lamping  
Custom finishes  
ENERGY STAR® qualified with 120V ballast

For photometric information, consult factory.

**Specifications and dimensions**  
subject to change without notice.

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

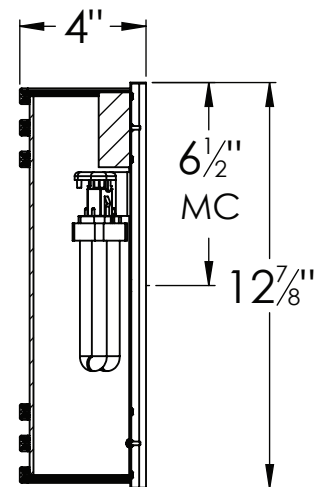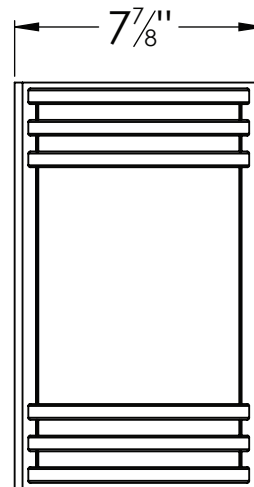

MC - Mounting Center

## Ordering Information:

Model No.	Finish	Lamps		Dimensions		
		Qty	Type	H	W	D
120-277V						
TRS213SNMV	Satin Nickel	2	13W CFQ 4-PIN	12-7/8"	7-7/8"	4"
120-277V						
TRS213RBMV	Oil-Rubbed Bronze	2	13W CFQ 4-PIN	12-7/8"	7-7/8"	4"
120-277V						
TRS213SBMV	Satin Brass	2	13W CFQ 4-PIN	12-7/8"	7-7/8"	4"