

T5 Low Profile Striplight STN Series

Features

Low profile standard T5 1 or 2 light strip channel provides general illumination for indoor and damp applications. Product features include snap assembly of ends and socket bars and requires no tools. Fixture can be mounted individually or in continuous rows for surface or suspended mounting. Applications include coves, light commercial, industrial, retail and displays.

Construction

Channel is die-formed from 22-gauge steel. Electrical connections are made inside the wire way. Standard mounting holes and wiring knockouts are included.

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

No diffuser for this fixture. Fluorescent lamps are exposed.

Electrical

This unit can be ordered in the following ballast options:

- UL Listed, High Power Factor Programmed Start
Electronic Ballast 120-277V 50/60 Hz AC (MV suffix).

Lamping

The following 1 or 2 light lamping options are available, lamps not included.

- F14T5 • F24T5HO
- F21T5 • F39T5HO
- F28T5 • F54T5HO

Certification

cULus listed for damp locations.

Options (Consult Factory)

- Reflectors
- Fusing
- Emergency battery back-up



Ordering Information for T5 Low Profile Striplight

Use guide below to order complete fixture. Example: STN154MV



STN	MV		
Series	Lamp Qty.	Lamp Type	Ballast
STN	1 = 1	14 = F14T5	MV = 120-277V Universal Voltage
	2 = 2	21 = F21T5	
		28 = F28T5	
		24 = F24T5HO	
		39 = F39T5HO	
		54 = F54T5HO	

For photometric information, consult factory.
Specifications and dimensions subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

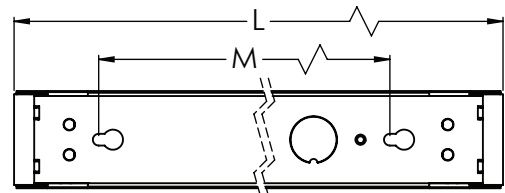

Lamp	L	W	D	M
1 - F14T5 or F24T5HO	22"	1-7/8"	2-3/8"	18-3/8"
1 - F21T5 or F39T5HO	34"	1-7/8"	2-3/8"	30-3/8"
1 - F28T5 or F54T5HO	46"	1-7/8"	2-3/8"	42-3/8"

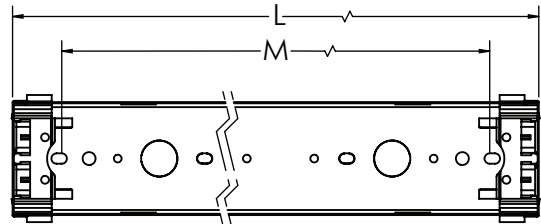

Lamp	L	W	D	M
2 - F14T5 or F24T5HO	22-3/8"	3-1/8"	2-3/4"	20-1/16"
2 - F21T5 or F39T5HO	34-3/8"	3-1/8"	2-3/4"	32-1/16"
2 - F28T5 or F54T5HO	46-3/8"	3-1/8"	2-3/4"	44-1/16"