

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Bilbao Decorative Linear BBL Series

Features

Bold geometric lines and curved surfaces accent this contemporary (3) lamp T8 linear flush mount. It has extruded aluminum rails in a natural satin finish. Diffuser is frosted white Acrylic. Fixture can mount to a standard junction box (not included) or splice connections can be made in the wiring channel.

Construction

The ballast/wiring channel is formed from 22-gauge steel and is provided with mounting holes and wiring access. The decorative bands are 0.060" thick extruded aluminum.

Finish

All metal parts are finished in plated satin nickel. Internal housing is finished in lighting grade baked white enamel.

Diffuser

Diffuser is 0.090" thick matte white acrylic. Diffuser is mounted to extruded bands and vertical bars. Frame mounts to electrical channel with turn latch and support clip.

Electrical

This unit can be ordered in the following ballast options:


1. UL Listed, High Power Factor Programmed Start Electronic Ballast 120-277V- 50/60Hz AC (MV suffix).

Lamping

For use with 3/32 watt T8 lamps.

Certification

cULus listed for damp locations.
ENERGY STAR® qualified at 120V.

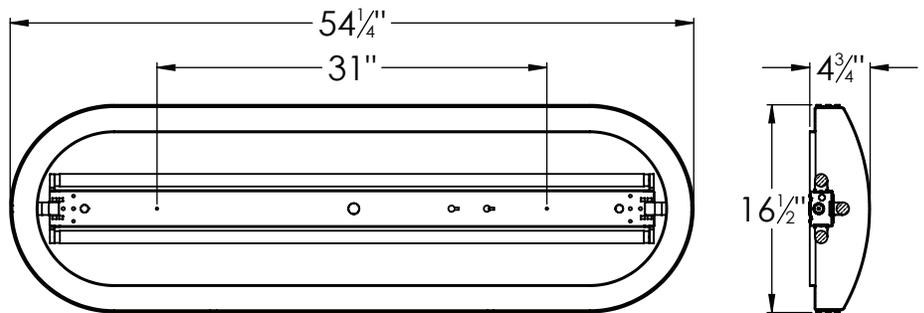

Ordering Information for Bilbao Decorative Linear

Use guide below to order complete fixture. Example: BBL332SAMV

BBL	3	32	SA		
Series	Lamp Qty.	Lamp Type	Finish	Ballast	Options
BBL	3 = 3	32 = F32T8	SA = Satin Aluminum	MV = 120-277V Universal Voltage (STD) ¹ Dimming Options D2-120 = 120V Advance Mark 10 [®] D2-277 = 277V Advance Mark 10 [®] D3-MV = 120-277V Advance Mark 7 [®]	Blank = (STD) EM05 = Emergency Battery Pack, 500 Lumen Minimum EM10 = Emergency Battery Pack, 1,000 Lumen Minimum EMCH = Emergency Battery Pack, For Chicago
Notes: ¹ ENERGY STAR® qualified at 120V.					

For photometric information, consult factory.
Specifications and dimensions subject to change without notice.