

**Ceiling Troffer**  
**ET224/2U4/242/243/244**

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

**Features**

Low profile, static T8 luminaire for 2 x 4 or 2 x 2 and 2, 3 and 4 lamp grid-ceiling applications provide general illumination for recessed indoor applications. Product features include a hinged door with cam action latches for easy maintenance, housing has reinforced ribs for extra rigidity and ends have built in earthquake clips for T-grid attachment. Fixture corners have tie holes for safety wire attachment. Can be mounted individually or in continuous rows. Applications include commercial offices, hospitals and retail spaces.

**Construction**

Heavy gauge housing and hinged door are die-formed of 22-gauge steel. Ballast cover and wiring access plate snap in and out for easy installation. Electrical connections are made inside the wire way.

**Finish**

Housing is finished in lighting grade white baked gloss enamel paint.

**Diffuser**

Diffuser is nominal .100" thick clear prismatic acrylic.

**Electrical**

This unit can be ordered in the following options: with UL listed instant-start, electronic high power factor ballast; 120V 60Hz AC (E8 suffix), 120-277 Universal 50/60Hz AC (MV suffix).

**Lamping**

For use with T8 fluorescent linear lamps for 2 x 4 or 2 x 2 and T8 U 6" lamp for U lamp applications; lamps are supplied by others.


**Certification**

All fixtures are cULus listed for damp locations.

**Options (consult factory)**

- Parabolic or egg crate diffusers
- Dimming
- Fusing
- 6' flexible conduit and lamped
- Inboard/outboard wiring
- Emergency battery back-up
- ENERGY STAR qualified with 120V ballast

Specifications and dimensions  
subject to change without notice.

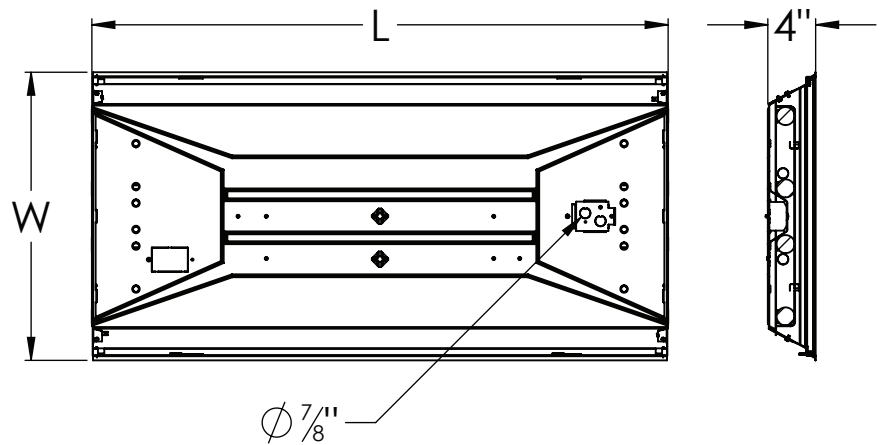

**Ordering Information:**

Model No.	Lamps		Dimensions				
	120V	277V	Qty	Lamp	L	W	D
White	ET224AE8	ET224AMV	4	F17T8	24"	23-7/8"	4"
White	ET2U4AE8	ET2U4AMV	2	FB32T8	24"	23-7/8"	4"
White	ET242AE8	ET242AMV	2	F32T8	48"	23-7/8"	4"
White	ET243AE8	ET243AMV	3	F32T8	48"	23-7/8"	4"
White	ET244AE8	ET244AMV	4	F32T8	48"	23-7/8"	4"