


## 34 331 1/2" Thermostatic Rough-In Valve



### Description

Paraffin cartridge  
 1/2" NPT male connections  
 Built-in check valves  
 Service stops  
 Temperature control only  
 GROHE TurboStat® Technology  
 Separate volume control required  
 Requires Twin Ell for shower/tub combinations with diverter tub spout  
 Back-to-back installation possible by reversing the cartridge - No additional parts required  
 Fits all GROHE (non-integrated) thermostat trims

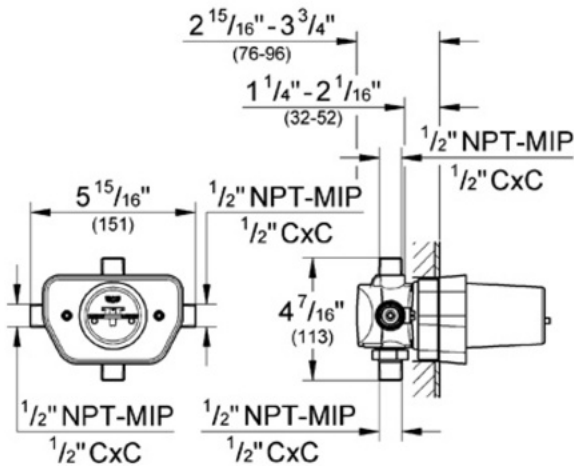

### Flow Rate

9 gpm at 45 PSI

### Code Compliance

ASME/ANSI A112.18.1M  
 ASSE Standard 1016  
 CSA Standard B125.1-05

### Finish Options

34 331 000 Rough-In