



Grotherm 3000 29 714 Diverter/Transfer Rough-in Valve

Description

5-port (2 inlets, 3 outlets)

1/2" NPT female threads

Note: Plug one inlet when using mixed water.

Flow Rate


18.5 gpm at 45 psi

Code Compliance

- ASME/ANSI A112.18.M

Finish Options

29 714 000 Rough Brass

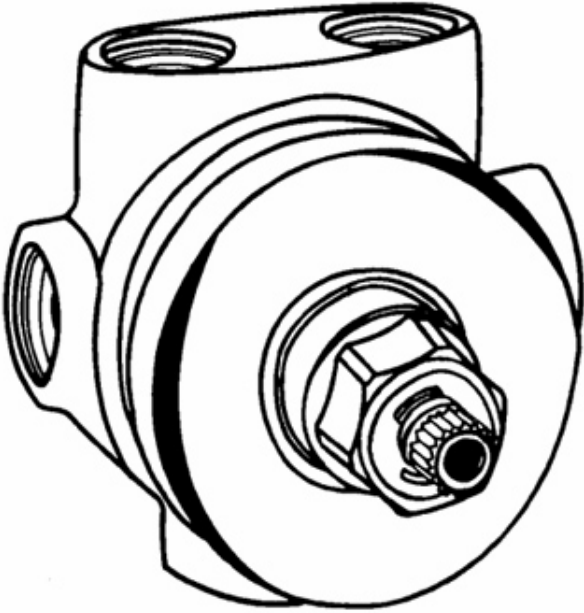

Flow Rates:

Psi	15	30	45	60	75	90
g/min.	10.0	15.0	18.5	21.0	24.0	26.0

