

DESCRIPTION

LIGHT FIXTURE:

- Corrosion resistant finish
Polished brass finish (Models 741BRNT & 741BRFLNT)
Satin nickel finish (Model 741SNNT)
Painted white finish (Models 741WHNT & 741WHFLNT)
- Frosted melon glass shade
- Close mount design
- Uses two 60 Watt maximum, type A, medium base bulbs (Models 741BRNT, 741SNNT & 741WHNT) or two 13 Watt fluorescent bulbs* (Models 741BRFLNT & 741WHFLNT). Bulbs not included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter


NOTE: For installation in ceilings up to 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)
Use supply wiring rated for at least 90° C



SPECIFICATIONS

MODEL	VOLTS	AMPS	CFM	SONES	DUCT
741BRNT	120	2.2	70	3.5	4" Round
741SNNT	120	2.2	70	3.5	4" Round
741WHNT	120	2.2	70	3.5	4" Round
741BRFLNT	120	1.6	70	3.5	4" Round
741WHFLNT	120	1.6	70	3.5	4" Round

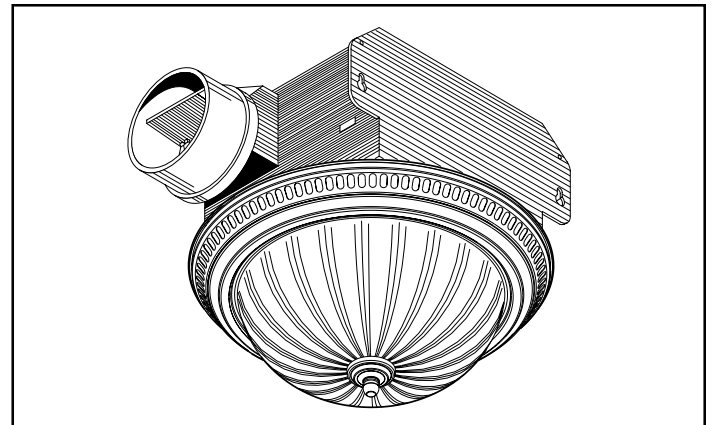

ARCHITECT'S SPECIFICATION


- Decorative Light / Fan shall be NuTone Model 741BRNT (741SNNT) (741WHNT) (741BRFLNT) (741WHFLNT) as manufactured by NuTone according to specifications listed:
- Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.
- Blower assembly shall be removable and have a permanently lubricated motor.
- Light fixture assembly shall be plug-in, removable and include a frosted melon glass shade and a corrosion-resistant base with polished brass (Models 741BRNT & 741BRFLNT), satin nickel (Model 741SNNT), & painted white (Models 741WHNT & 741WHFLNT) finish.
- Lamps shall be two 60 Watt maximum, type A, medium base, incandescent (Models 741BRNT, 741SNNT, & 741WHNT) or two 13 Watt fluorescent* (Models 741BRFLNT & 741WHFLNT).
- Air delivery to be no less than 70 cfm and sound level no greater than 3.5 sones. Air and sound ratings shall be certified by HVI.
- Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

* Use only one of the following 13W fluorescent bulbs: Sylvania (CF13DD/827), G.E. (F13DBX23T4/SPX27), Philips (PL-C 13W/27/USA), Osram (CF13DD/827), Broan (97010729).



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf

products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

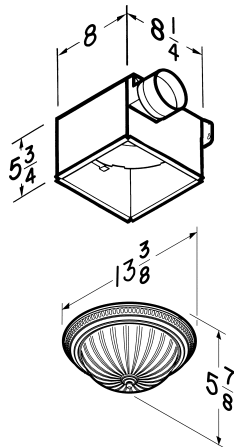

INSTALLATION

Complete installation instructions are included with each Decorative Light / Fan.

NuTone, Inc., Madison and Red Bank Roads, Cincinnati, OH 45227 (1-888-336-6151)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date