TSKT SMA Thermostatic Mixing Valve



TSKT - SMA Thermostatic Mixing Valve


- Shape Memory Alloy (SMA) Thermostatic Mixing Valve prevents scalding
- Shape Memory Alloy coil allows faster water temperature response than conventional wax-type thermostatic valves
- Maintains desired water temperature more effectively than conventional valves
- Brass valve body
- Integral shut-off / check valve
- NPT connection
- 1/2" valve

TSKT

SMA Thermostatic Mixing Valve

□ Note: Shower Trim Required
TSKT Thermostatic Mixing Valve
requires Kiwami™ Renesse™
Thermostatic Mixing Valve Trim,

model TS170T#CP sold separately.

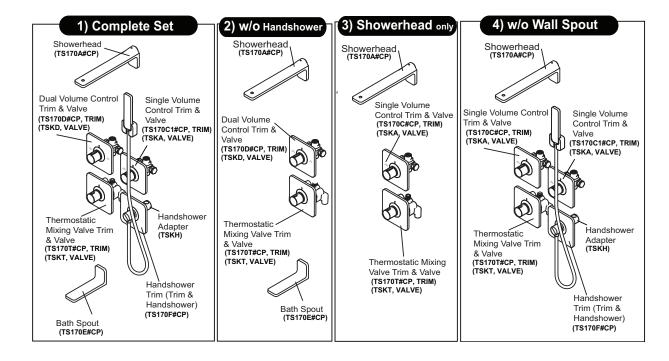

TSKT

SMA Thermostatic Mixing Valve

DESIGN

Designed to work with TOTO's Kiwami™ Renesse® shower sets, this SMA Thermostatic Mixing Valve is designed to prevent scalding and optimize water temperature control.

■ SPECIFICATIONS

Warranty: Lifetime Limited Warranty

(Residential use)

One Year (Commercial use)

Material: Brass

Shipping Weight:

5 lbs.

Shipping Dimensions:

8-1/2"L x 8-1/2"W x 6"H

■ CODES/STANDARDS

Complies with and exceeds the following standards:


ASSE 1016 TYPE T

ASME A112.18.1M / CSA B125-2005

Listed by:

IAPMO/c-UPC, and other municipalities

These dimensions and specifications are subject to change without notice.

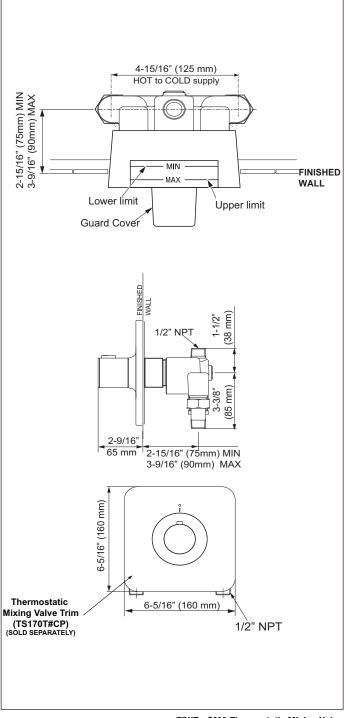

TSKT - SMA Thermostatic Mixing Valve



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO® LTD. 01/06 #J10102