

ELKAY[®] SPECIFICATIONS

Asana™ Universal Mount Sinks Model SCF16 Series

GENERAL

High quality sink formed of #18 (1.2mm) gauge copper or type 304 (18-8) nickel bearing stainless steel material. Specialty Collection copper sinks are made from genuine solid, uncoated material and will naturally tarnish. Select models available with Statement feature. Universal mount sink can be installed as a top mount or undermount.

- SCF16CH copper with hammered mirror finish
- SCF16CM copper with mirror finish
- SCF16CS copper with satin finish
- SCF16SH stainless steel with hammered mirror finish
- SCF16SM stainless steel with mirror finish
- SCF16SR stainless steel with a rugged satin finish

DESIGN FEATURES

Bowl Depth: 7" (178mm).

Underside: Fully undercoated to reduce condensation and dampen sound.

Fastening Method: For drop-in application, utilize clips and attach to threaded stud (see illustration "A" below). For undermount application, utilize undermount mounting clips-not furnished (see illustration "B" below).

OTHER

Drain Opening: 1-1/2" (38mm).

Sink includes overflow assembly with matching face plate.


 Sink models SCF16CH, SCF16CM, SCF16CS, SCF16SH, SCF16SM and SCF16SR are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.

OPTIONAL ACCESSORIES


Drain: LK174, LK175

OPTIONAL STATEMENT FEATURE

Part No. Suffix for Statement Option	Pattern Name	Pattern Graphic	Pattern Style & Location
BAM	Bamboo		Entire inside bowl surface
BBL	Bubbles		Entire inside bowl surface
GRB	Garland Bath		Border – all around the sink bowl
HER	Hers		Patch – rear wall only
HIS	His		Patch – rear wall only
SEA	Seaside		Border – all around the sink bowl

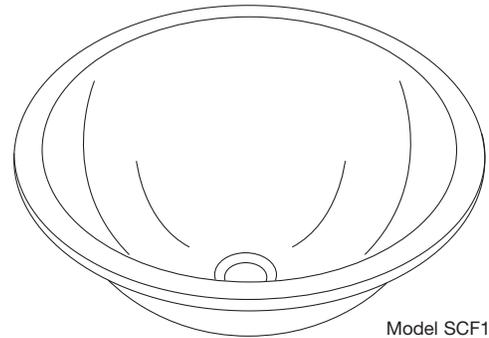

Model SCF16

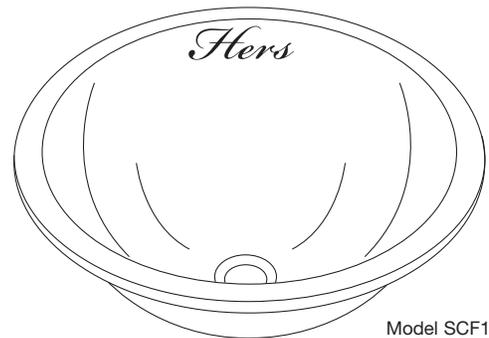

Model SCF16HER

ILLUSTRATION A

Installation Profile for Top Mount Application


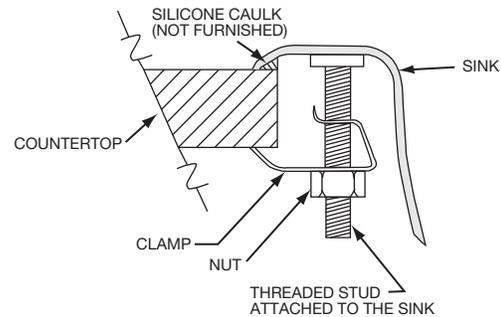


ILLUSTRATION B

Installation Profile for Undermount Application

The template provided with each sink provides the only type of undermount installation recommended by Elkay.

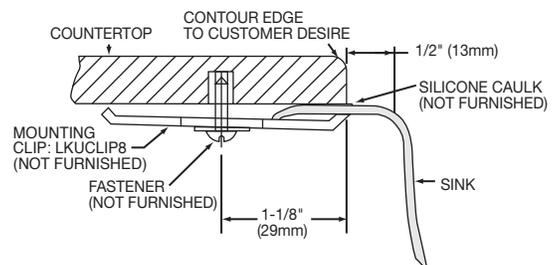

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Asana™ Universal Mount Sinks
Model SCF16 Series

ELKAY®
SPECIFICATIONS

SINK DIMENSIONS*

Model Number	O.D.	I.D.	D	Cutout in Countertop	Minimum Cabinet Size
SCF16CH	16¼ (413mm)	14 (356mm)	7 (178mm)	See Template for undermount application. For drop-in application use sink upside down as template and cut 5/16" (8mm) INSIDE sink outline.	21 (533mm)
SCF16CM	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)
SCF16CS	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)
SCF16SH	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)
SCF16SM	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)
SCF16SR	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)
SCF16SM_ _ _ (Statement option)	16¼ (413mm)	14 (356mm)	7 (178mm)		21 (533mm)

*Length is left to right. Width is front to back.

