

GENERAL

Elkay Quartech sinks are molded from finely ground natural quartz and high performance acrylic resins into a finished product that exceeds customer expectations. The material offers antimicrobial product protection achieved through the use of silver dispersed throughout the matrix. Non-porous, easy to clean, and resistant to strains, the Quartech sinks are also durable and scratch resistant. The sinks are naturally sound deadened and heat resistant to 550° with the color consistent throughout the material. An integrated shelf adjacent to the sink compartment offers additional space for food preparation.

DESIGN FEATURES

Bowl Depth: 8" (203mm). Rim Height: 3/8" (10mm). Material: Elkay Quartech.

Color Options with natural accents: Black (BK), Husk (HK), Java

(JV) or White (WH).

OTHER

Drain Opening: 3-1/2" (89mm).

Note: Faucet holes are pre-scored for flexible installation.

Installer can punch up to 4 faucet holes.

These sinks comply with ANSI Z124.6 and CSA B45-02.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

SINK DIMENSIONS*

	Overall		Inside Bowl				No. of Pre- scored 1-1/2"	Minimum
Model Number	L	w	L	w	D	Cutout in (38mm) Dia. Countertop Faucet Holes	Cabinet Size	
ELQT2218LBK ELQT2218LWH ELQT2218LHK ELQT2218LJV	22"	18" (457mm)	12-5/8" (321mm)	12" (305mm)	8" (203mm)	Use sink upside down as template and cut 5/16" (8mm) inside sink outline	4	27" (686mm)

^{*}Length is left to right. Width is front to back.

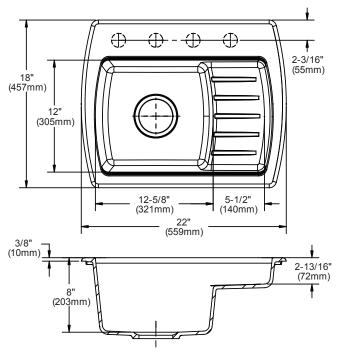


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not

COUNTERTOP (MAXIMUM THICKNESS FOR USE OF

HOLD DOWN SYSTEM IS 1-3/4" [44mm])

Cross Profile of Installation





OPTIONAL ACCESSORIES*

		Overall			
Model Number	Description	L	w	Depth/Thickness	Material/Finish
LKKDT35	Drain	Fits 3	1/2" (89mm)	Drain Opening	Chrome Plated
LKD35XX	Drain	Fits 3	1/2" (89mm)	Drain Opening	Polymer
LKS35XX	Drain	Fits 3	1/2" (89mm)	Drain Opening	Polymer
LKPS913SS	Prep Shelf	9-11/16" (246mm)	12-1/4" (311mm)	1/4" (6mm)	Polished Stainless Steel
LKVBG1312SS	Bottom Grid	10-5/8" (270mm)	9-5/8" (244mm)	1-1/8" (29mm)	Polished Stainless Steel
LKCB913HW	Cutting Board	9" (229mm)	13-5/8" (346mm)	3/4" (19mm)	Hardwood

^{*}Length is left to right. Width is front to back.







LKPS913SS

LKVBG1312SS

LKCB913HW