

SENTINELPRO™

SM-5480-ADA



Anti-Scald Thermostatic/ Pressure Balanced Handicap Shower Combination

SM-5480-ADA

SentinelPro shower system includes SentinelPro concealed anti-scald thermostatic/pressure balancing shower/bath valve combinations with integral volume control/diverter. Chrome plated brass wall plate. Chrome plated metal lever handle. Adjustable temperature limit stop (TLS). Factory set @ 110 F°. Brass body with integral spring check stops. Dual element thermostatic/pressure balancing cartridge. Can be installed back to back. Roughing-in template. Four port valve with 1/2" female copper sweat inlets and shower outlet. 1/2" NPT female tub outlet. Furnished with 1/2 pipe plug. In-line vacuum breaker. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Chrome 5' metal shower hose, 1/2" NPSF connectors. Swivel arm holder. 24" combination slide bar and grab bar, stainless steel and chrome. Meets ASSE 1016 & ASME 112.18.1/CSA B125.1 standards.

OPTIONS

SUFFIX	DESCRIPTION
--------	-------------


<input type="checkbox"/> VH	Vinyl white hose (combo with handheld shower only)
-----------------------------	--

This space for Architect/Engineer approval.



Rough-Ins

SM-5480-ADA

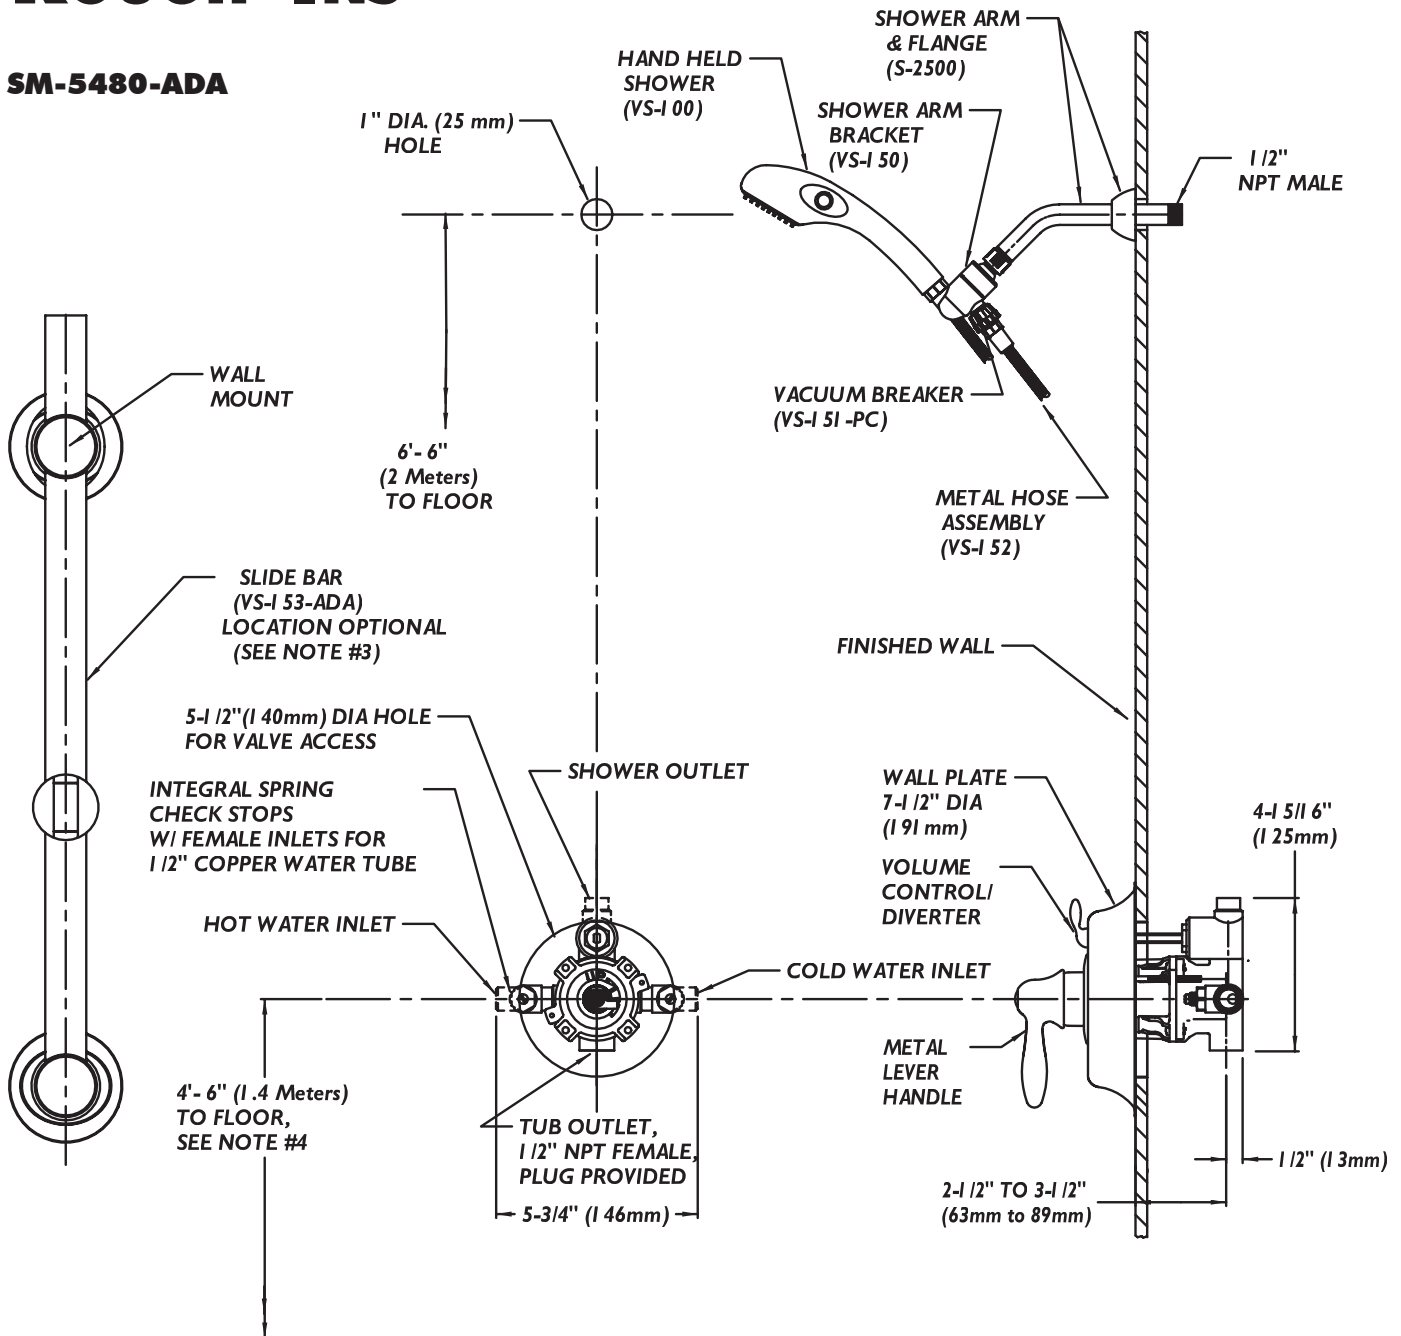

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. The location of the slide bar is optional, but restricted by the 60" hose length running from shower arm bracket to hand held shower and note #4. 4. For ICCIANSI A117.1 standard and/or ADA accessibility guidelines for building and facilities (ADAAG) for installation locations and required dimensions based on your specific shower configuration.