# **SPEAKMAN®**

S-3552 S-3562-LD



### **Single Lever Faucet**

### GENERAL SPECIFICATION 🕹

Polished chrome plated, NSF compliant, 4" centerset single lever faucet. All metal shell and belly plate. Ceramic cartridge. Water conserving aerator reduces flow to 2.2 gpm/8.4 lpm. Copper tube inlets with 1/2" NPSM compression threads. Meets ASME A112.18.1/CSA B125.1 and NSF 61 standards.

#### □ S-3552

4" centerset single lever faucet with 1-1/4" pop-up drain.

#### □ S-3562-LD

4" centerset single lever faucet. No drain assembly.

#### **OPTIONS**

SUFFIX	DESCRIPTION
□ВО	0.5 gpm flow control, vandal-resistant
☐ CA	No lead for CA AB1953 compliance
☐ GB	1.5 gpm flow control, vandal-resistant
□ LF	2.2 gpm laminar flow control outlet, vandal resistant
□ VR	2.2 aerated flow control, vandal-resistant







www.speakmancompany.com


## Rough-Ins


#### S-3552

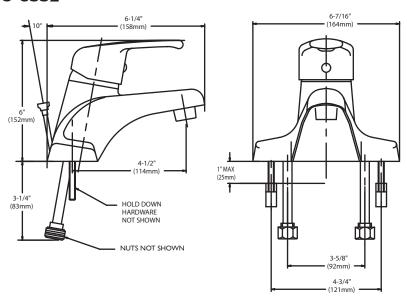



#### S-3562-LD

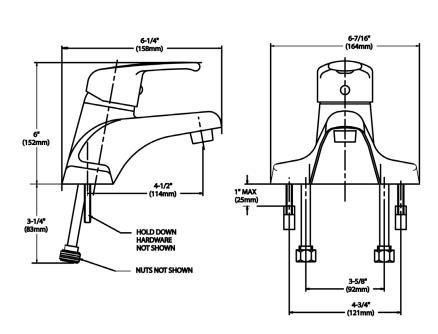



NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Lavatory inlets are sized for coupling connections. Unless otherwise specified, all inlets are 1/2" NPSM.