SPEAKMAN®

SE-625-SS

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-625-SS Safe-T-Zone® features the SE-490-SS eye/face wash with dual spray outlets, flip-top dust covers and all stainless steel bowl combined on an all stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" diameter stainless steel Flow Control: Internal 20 gpm regulator Valve: 1" NPT female stainless steel.

Full flow stay open ball valve

Activator: Stainless steel triangular pull rod Stanchion: 1½" Stainless steel, 18 gauge tubing.

Inlet & Waste: 11/4" NPT female

Finish: Stainless steel

Performance: 20 gpm @ 30 psi EYE/FACE WASH: SE-490-SS Bowl: 300 series stainless steel Spray Heads: (2) stainless steel

with plastic dust covers

Valve: 1/2" NPT stainless steel full

flow stay open ball valve

Activator: Stainless steel push handle


Inlet: 1/2" NPT female

Performance: 3.8 gpm @ 30 psi Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

Hand/Foot operation
Freeze protection valve
Scald protection valve
Flow switch
Hand-held spray
Top supply

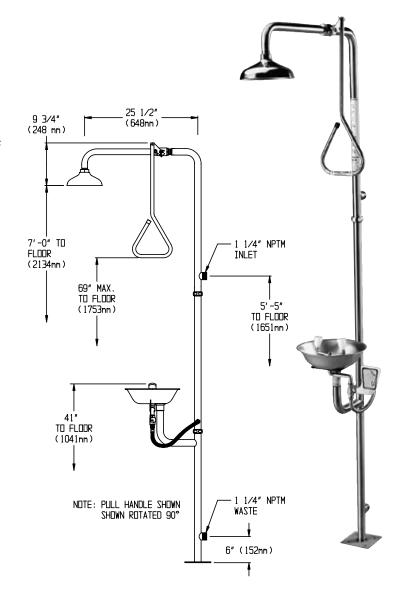

Job Name	
Location	
Architect/Engineer _	
Sales Representative	
Wholesaler	
Date	Model #