

SENTINEL MARK II®

SM-4040



SM-4041



Shower Combination

GENERAL SPECIFICATION

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure valve and hand held spray combination. Chrome plated brass wall plate with metal index. Chrome plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing module. Ceramic temperature regulating module. Can be installed back-to-back. Roughing-in template. Four port valve with 1/2" inlets and outlets. Furnished with 1/2" pipe plug. Chrome plated brass supply ell with wall flange. 69" square lock stainless steel hose with rubber liner. Swivel connector. In-line vacuum breaker. 30" chrome plated brass slide bar with mounting screws. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to exceed existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. Meets ASSE 1016, 1989 standard.

SM-4040

Anti-scald shower and bath with decorative index.

SM-4041

Anti-scald shower and bath with decorative index and Revere handle.

OPTIONS



SUFFIX	DESCRIPTION
<input type="checkbox"/> PC	VS-100-PC handheld shower, chrome finish
<input type="checkbox"/> VH	69" white vinyl hose
<input type="checkbox"/> SCS	Spring check stops

This space for Architect/Engineer approval.



Rough-Ins

SM-4040 SUPPLY ELL W/ FLANGE

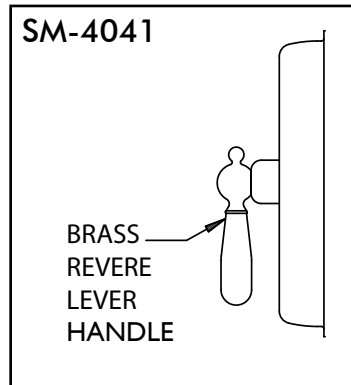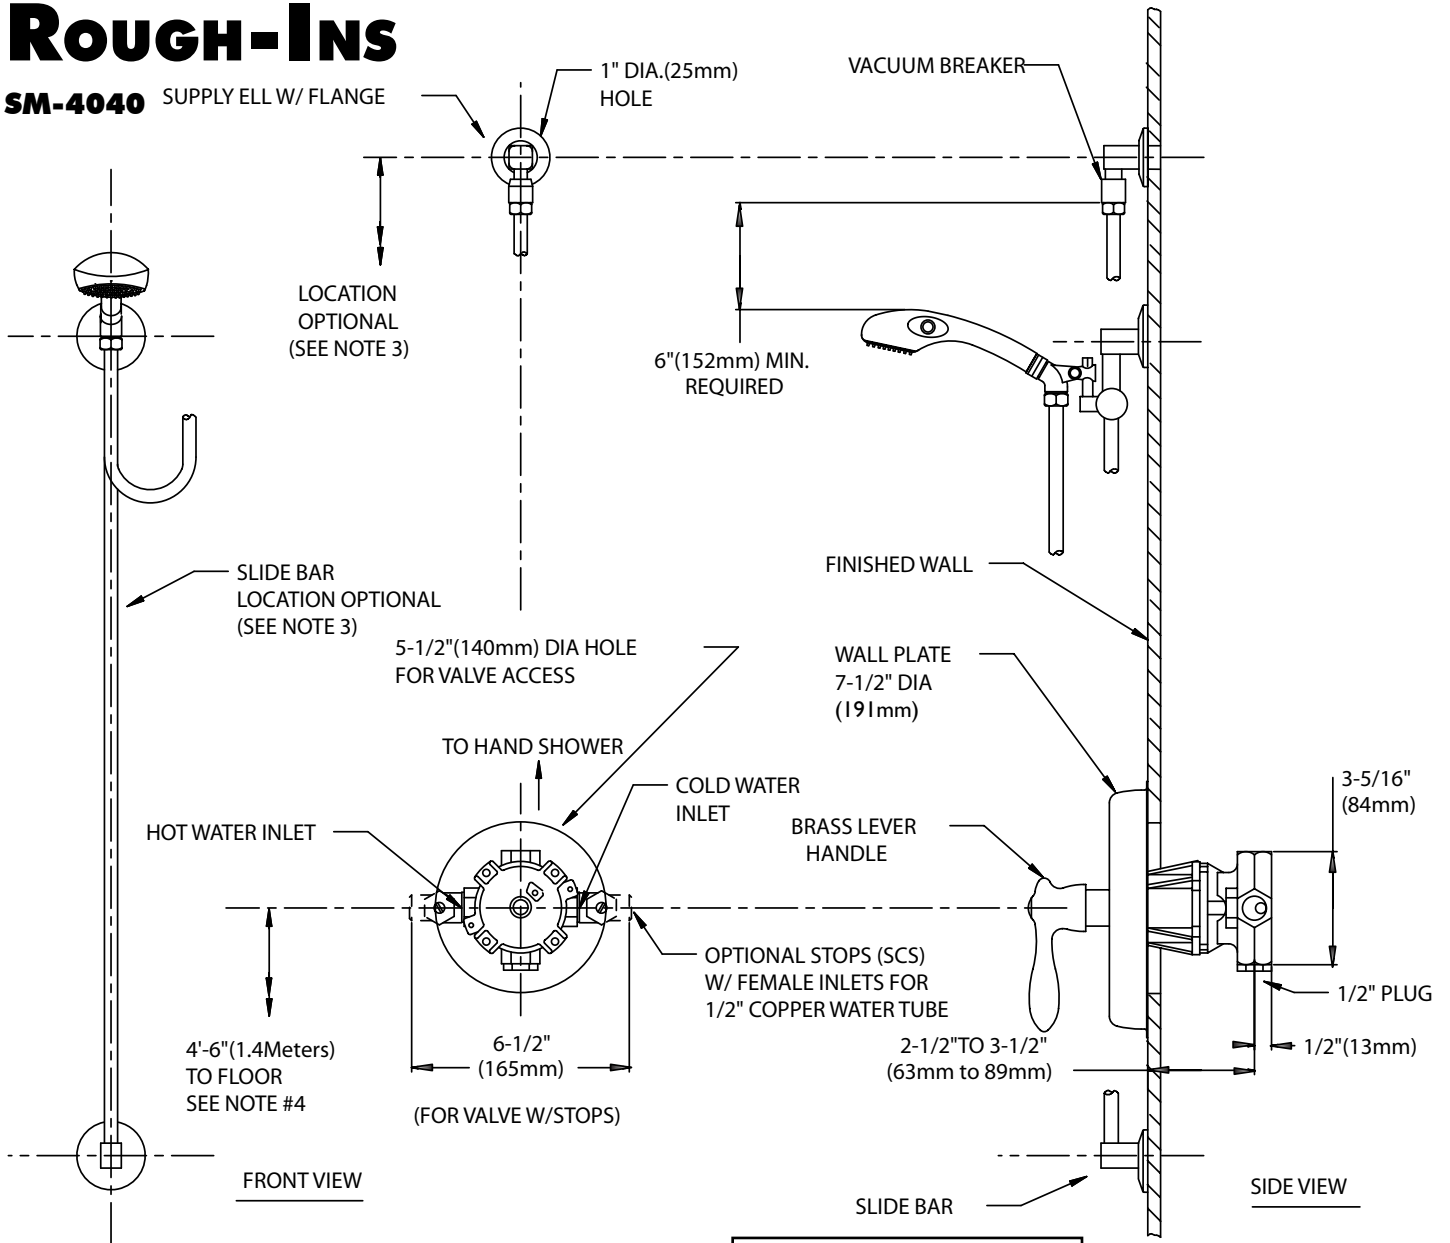

NOTE: Unless otherwise specified, all inlets and outlets are 1/2" NPTF. Locations of shower hangers are optional, but restricted by 69" hose length running from shower arm diverter connection to hand shower. Unless otherwise specified, all dimensions are in inches and are subject to change without notice. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.