

## VERSATILE™

SM-3060



## Shower Combination

### □ SM-3060

Versatile shower system includes Sentinel Mark II® concealed anti-scald balanced pressure shower valve and hand held spray combination. Chrome plated brass wall plate with metal index. Chrom plated brass lever handle. Independent center sleeve allows up to 1" of rough-in variation. Adjustable temperature limit stop. Brass body. Pressure balancing module. Four port valve with 1/2" inlets and outlets. Furnished with 1/2" pipe plug. Chrome plated brass supply ell with wall flange. Chrome plated transfer valve with brass lever handle and escutcheon. S-2270-AF Cosmopolitan® showerhead with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum to meet existing ASME A112.18.1/CSA B125.1 standard. S-2500 shower arm and wall flange. In-line vacuum breaker. VS-100-AF handshower with flow control device reduces flow to 2.5 gpm/9.46 lpm maximum, to meet existing ASME A112.18.1/CSA B125.1 standard. Non-positive shut-off meets ICC/ANSI A117.1 SEC. 608.6 and ADAAG. 69" square lock stainless steel hose with rubber liner. Chrome plated brass supply elbow with wall flange. 42" slide bar with mounting screws. Swivel connector. Meets ASSE 1016, 1989 standard.

### OPTIONS

SUFFIX	DESCRIPTION
--------	-------------


- |       |  |
|-------|--|
| □ LH  | Less showerhead                          |
| □ PC  | VS-100-PC handheld shower, chrome finish |
| □ SCS | Spring check stops                       |
| □ VH  | 69" white vinyl hose                     |
| □ 1   | S-2251-AF showerhead                     |
| □ 2   | S-2252-AF showerhead                     |
| □ 2VR | S-2252-AF vandal-resistant showerhead    |
| □ 3   | S-2253-AF showerhead                     |
| □ 4   | S-2220-AF showerhead                     |
| □ 6   | S-2288-AF showerhead                     |
| □ 7   | S-2291-AF showerhead                     |
| □ 9   | S-2292-AF showerhead                     |

This space for Architect/Engineer approval.



## ROUGH-INS

### SM-3060

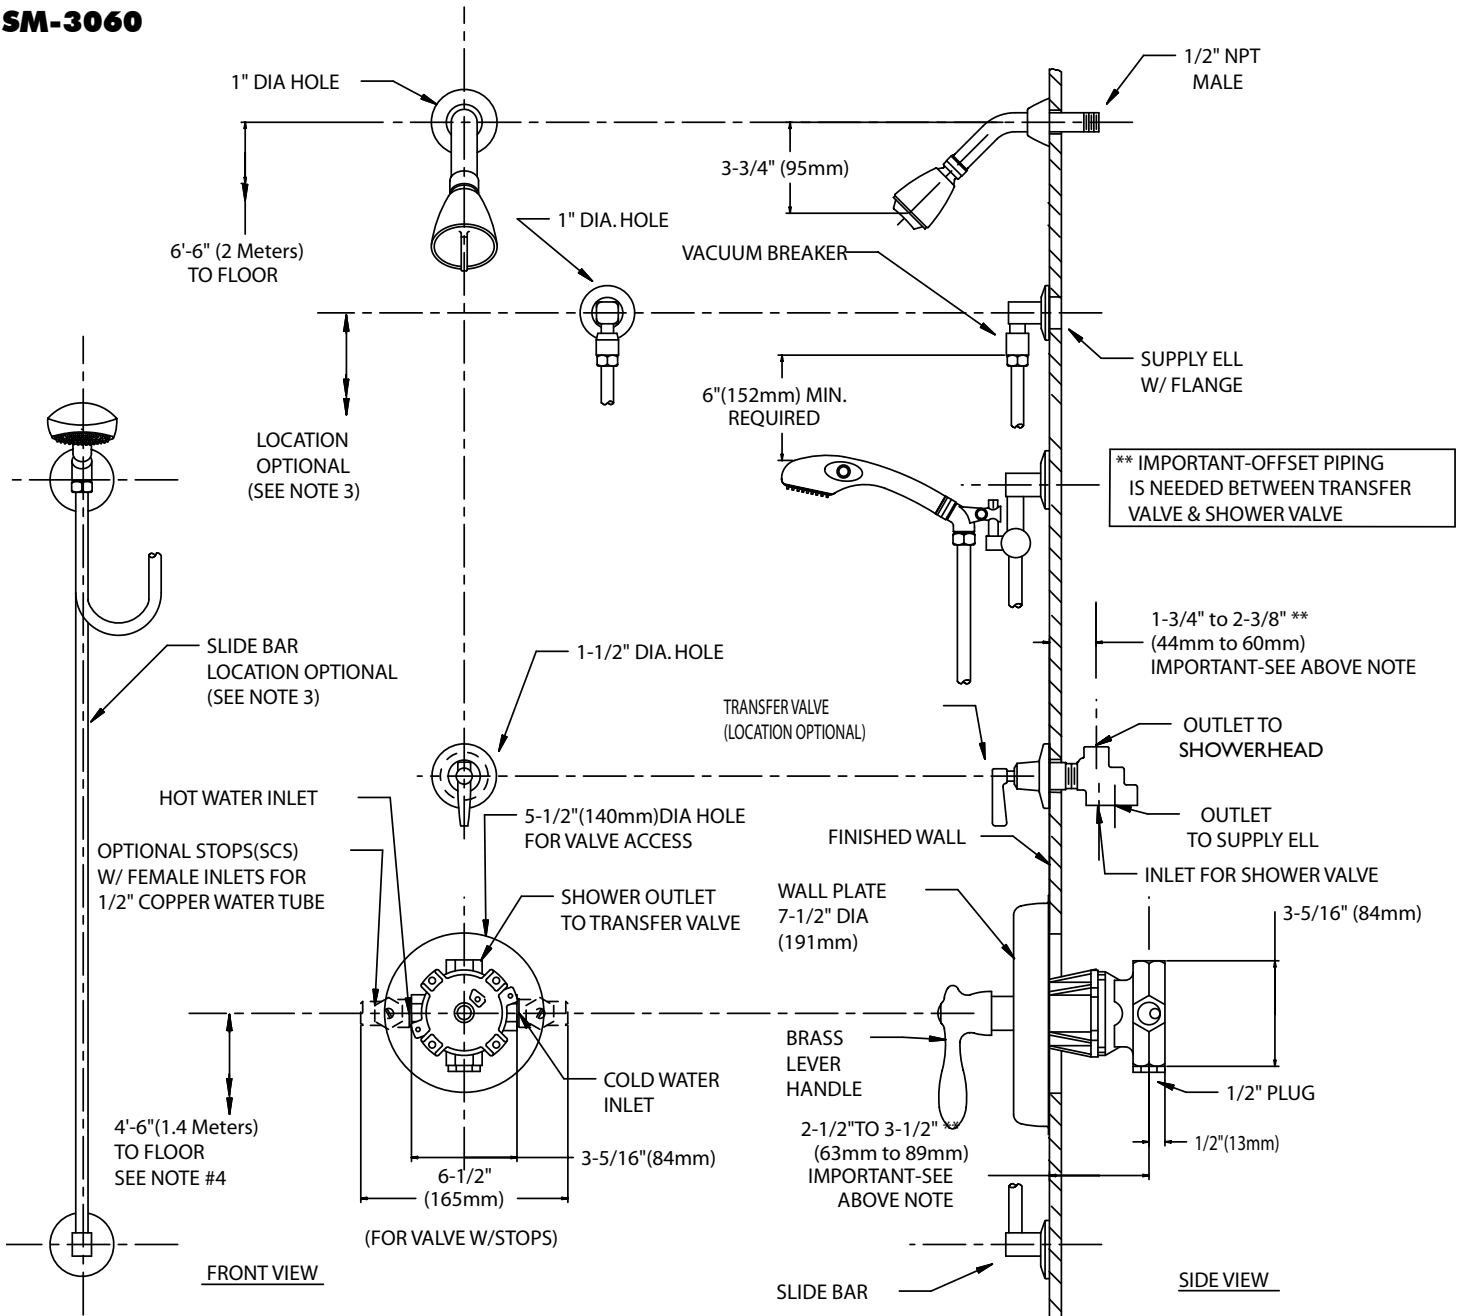

NOTE: Unless otherwise specified, all inlets and outlets are 1/2" NPTF. The location of the slide bar and supply ell is optional, but restricted by the 69" hose length running from supply ell connection to hand shower and the 6" minimum requirement between the in-line vacuum breaker and top of hand shower. Unless otherwise specified, all dimensions are in inches and are subject to change without notice. For ADA mounting locations consult ADAAG, ANSI A117.1, or state regulations.