

SPEAKMAN®

SE-609

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-609 Safe-T-Zone® freeze protected combination unit features the SE-400 eye/face wash with six aerated sprays and rectangular stainless steel bowl combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead. Supplies activated by frost-proof hydrants.

SPECIFICATIONS

Showerhead: 8" diameter Cyclac® yellow plastic

Flow Control: Internal 20 gpm regulator

Frost Proof Valve: 1 1/2" NPT female brass

Standard Bury Depth: 42"

Activator: Push handle

Stanchion: 1 1/4" IPS galvanized steel

Waste: 1 1/4" NPT female

Performance: 20 gpm @ 20 psi (flowing)

Finish: Dura Jade powder coated finish

EYE/FACE WASH: SE-400

Bowl: 300 series stainless steel

Spray Heads: (6) brass, chrome-plated aerated

Frost Proof Valve: 1" NPT female brass

Standard Bury Depth: 42"

Activator: Push handle

Shrouds: Yellow polypropylene

Performance: 3.0 gpm @ 30 psi


Compliance: ANSI Z358.1

Universal Emergency Sign Included

NOTE: The maximum "static" pressure allowable for this unit is 80psi

OPTIONS

- | | |
|------------------------------------------|--------------------------------|
| <input checked="" type="checkbox"/> FLW2 | Flow switches (2 Required) |
| <input checked="" type="checkbox"/> SSH | Stainless steel showerhead |
| <input checked="" type="checkbox"/> BH | Chrome plated brass showerhead |

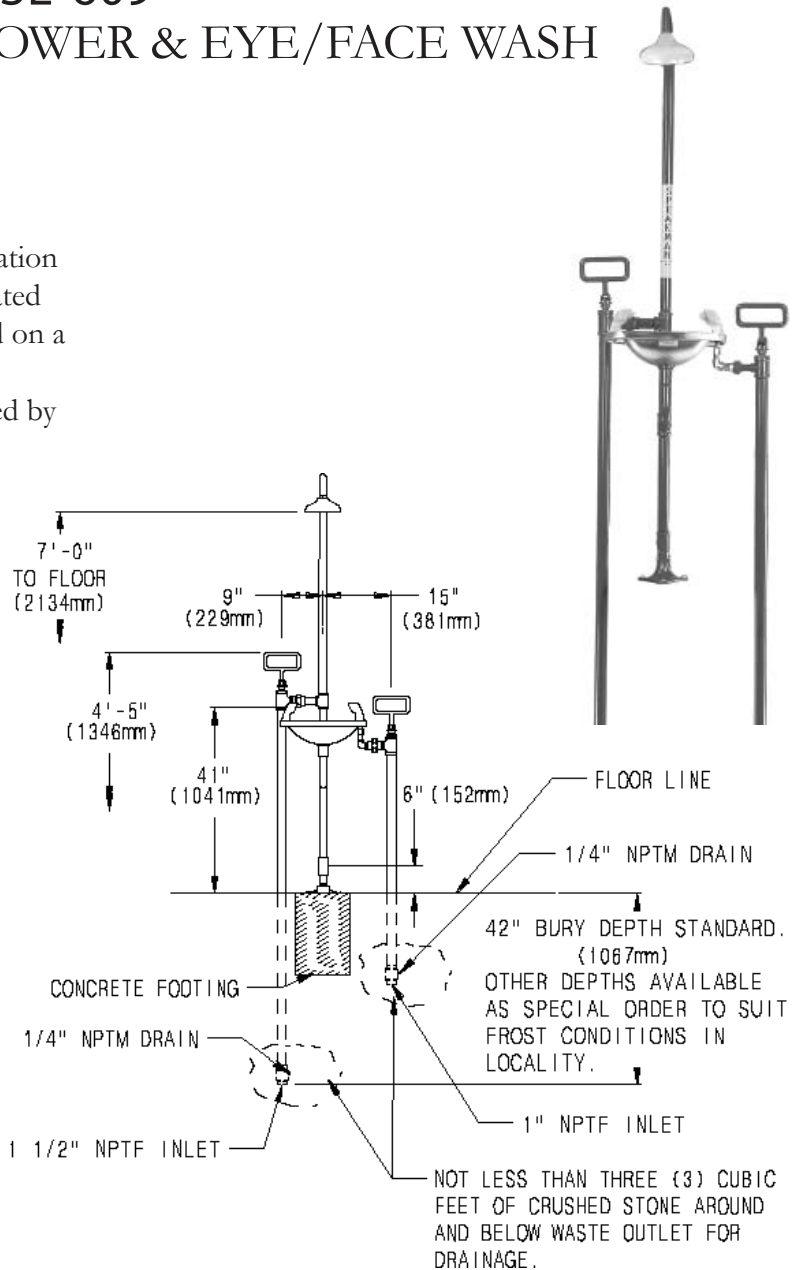

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____