

Features

- Durable high gloss finish.
- 8-3/8" (213 mm) basin depth.
- Offset bowl design.
- 33" (838 mm) x 22" (559 mm) x 8-3/8" (213 mm),

Material

• Compression molded from our exclusive solid Vikrell® material.

Installation

- Top-mount or undercounter installation.
- Four-hole point locators for 1-, 2- 3-, or 4-hole faucet installation.



Maxeen®



Codes/Standards

Greenguard UL 2818 - Gold


STERLING[®] Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color Code Description



USA/Canada: 1-800-STERLING (1-800-783-7546) www.sterlingplumbing.com 4-18-2015 06:17



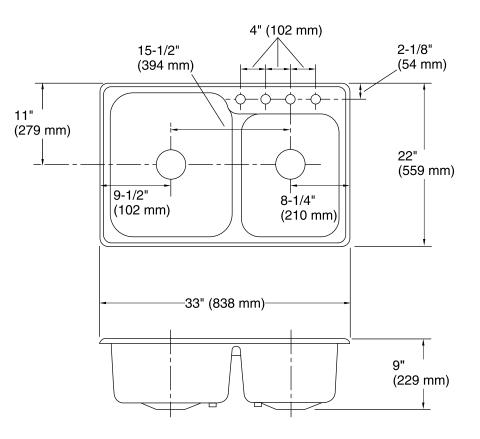

Technical Information

All product dimensions are nominal.	
Bowl configuration:	Offset
Installation:	Top-mount, Under-mount
Cutout:	Top-mount, 32-1/4" x 21-1/4" (819 mm x
	540 mm)Top-mount, 13-1/4" x 16-1/16"
	(337 mm x 408 mm)
Bowl area (Left)	Length: 15-1/4" (387 mm)
	Width: 18-3/4" (476 mm)
	Bowl depth: 8-3/8" (213 mm)
Bowl area (Right)	Length: 13-1/4" (337 mm)
	Width: 16-1/16" (408 mm)
	Bowl depth: 8-3/8" (213 mm)
Number of deck holes:	4
Faucet hole(s):	1-7/16" (37 mm)
Drain hole:	3-1/2" (89 mm)

Notes

Install this product according to the installation guide.