

STERLING®


A KOHLER COMPANY

PERFORMA™

Features

- Compression molded from our exclusive solid Vikrell® material
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Wall surround allows for attachment of grab bars
- 60-1/4" (1530 mm) x 30" (762 mm) x 76-1/2" (1943 mm) complete unit rough-in dimensions includes flange
- 60" (1524 mm) x 29" (737 mm) x 75-1/2" (1918 mm) complete unit finished dimensions

60" (1524 mm) BATH/SHOWER SYSTEM WITH BACKER BOARDS 71040116

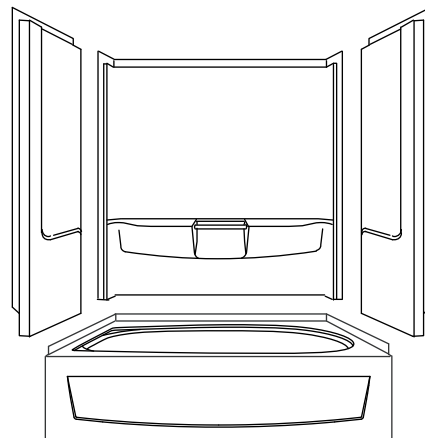

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71040116	60" (1524 mm) bath/shower system and wall surround with backer boards, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71040118	60" (1524 mm) bath/shower system and wall surround with backer boards, above-the-floor left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71040126	60" (1524 mm) bath/shower system and wall surround with backer boards, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71040128	60" (1524 mm) bath and wall surround with backer boards, above-the-floor right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Model	Wall Component Description	Colors/Finishes	
71044106	Complete wall set with backer boards	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

PERFORMA™

Technical Information

Fixture:*	basin area	top area
Bathing well	21" (533 mm) x 39" (991 mm)	24" (610 mm) x 53" (1346 mm)
	water depth	capacity
To overflow	10-1/4" (260 mm)	35 gal (132.5 L)
* Approximate measurements for comparison only.		

Model	door maximum width	door maximum height
71040116 71040118 71040126 71040128	56-3/4" (1441 mm)	59-1/2" (1511 mm)

Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

Attach grab bars at the specified backer board locations only.

