


**Steam Generator** **Model SM-12**

**Features:**

- 5 years parts warranty - 2 years labor warranty
- Generator typically can be installed up to 25 ft from the bathing area
- Diagnostic LED Displays
- Stainless-Steel Construction
- Solid-State Circuitry

**Codes/Standards:**

- UL 499
- UL/CUL Listed
- City of LA - Approved
- City of New York - M.E.A. Approved

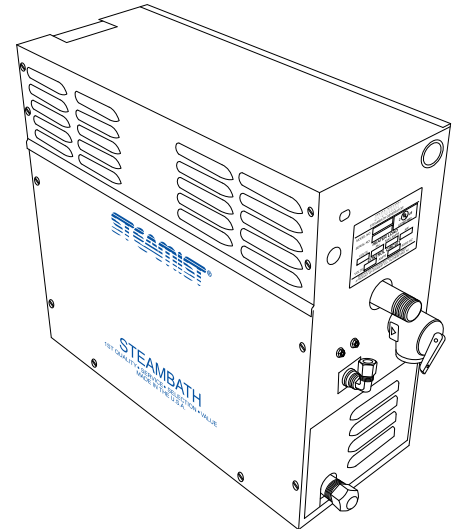

**Steam Generator Specification Chart**

Model Number	Product Number	KW Rating	Max. Cu. Ft. Range *	Volts/Phase/Max. Amps	Wire Size 90°C Copper AWG	Line Fuse	Dimensions L x W x H
SM-12	1200	12	450	240/1/50	6	70	20" x 8 1/4" x 18"
	1201			208/1/58	4	80	
	1202			240/3/29	8	40	
	1203			208/3/33	8	45	

\* Refer to sizing guidelines to accurately determine the proper size generator for the installation.

**Required Equipment:**

TC-110, TC-135, DSC-425, or DSP Controls

**Required Electrical Service:**

Dedicated circuit required: See Specification Chart for proper electrical requirements

**Product Information:**

Dedicated circuit required: See Specification Chart for proper electrical requirements

- Water Supply - 3/8" Compression Fitting
- Steam Line - 3/4" Brass BPT male thread
- Pressure Relief Valve - 3/4" NPT female thread
- Drain Line - Capped 1/2" Brass NPT male thread (Auto-Drain Ready)

**Generator:**


Weight - 52 lbs.

**Installation Notes:**



- Steam Generators can be typically mounted within 25ft of the bathing area.
- Steam Generators should be accessible for service.
- Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.
- Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

**Rough-In Notes:**

Access: 28"W x 18"D x 20"H (35"W with Auto-Drain)

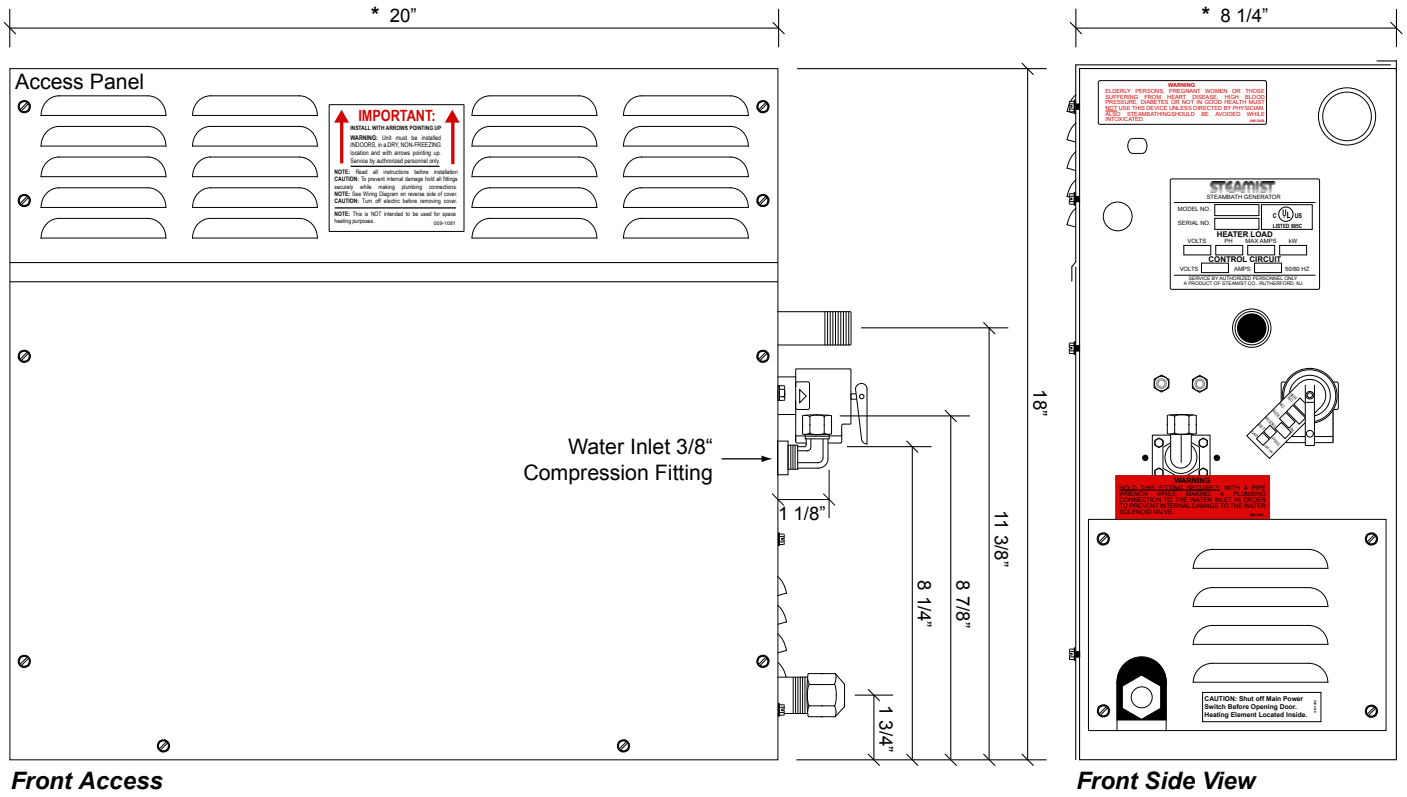

\* Add 1/4" to the dimension for the louvres

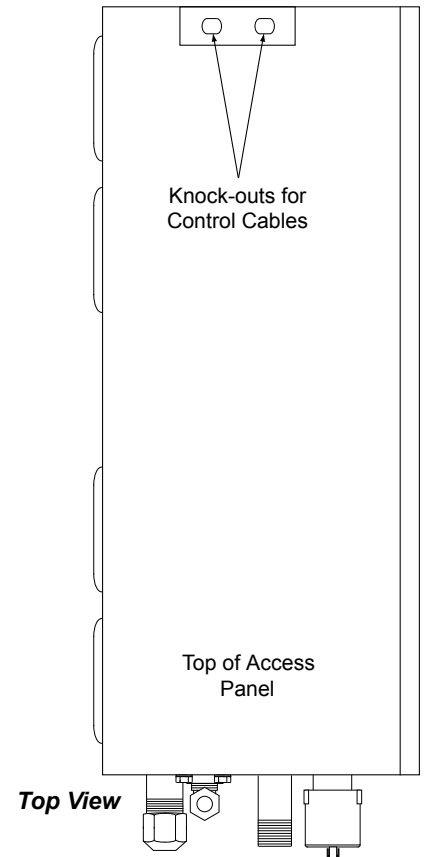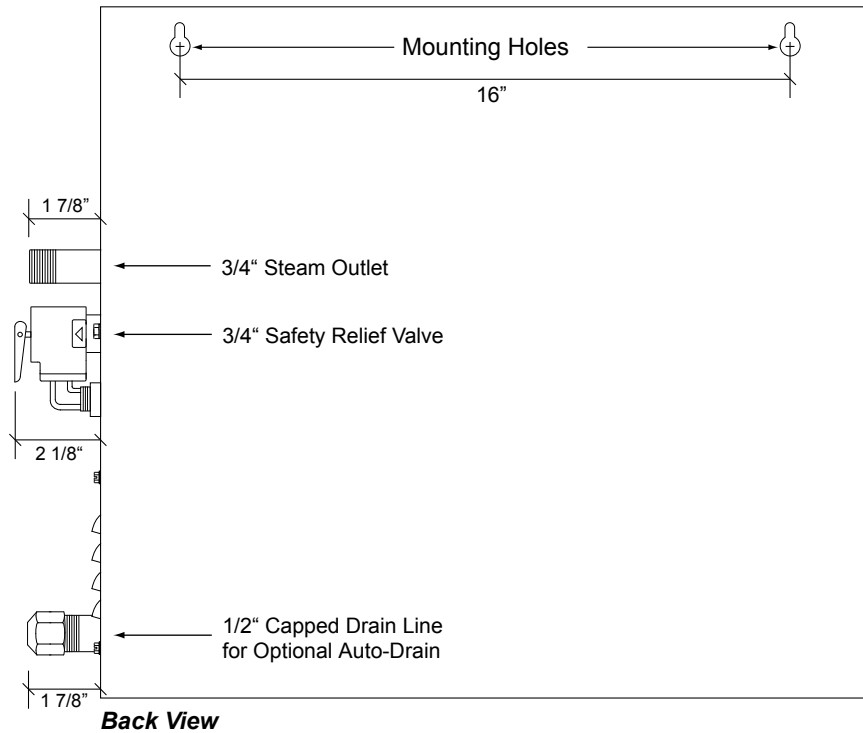

East Coast Office: 275 Veterans Blvd., Rutherford, NJ 07070 • Phone: (800) 577-6478 Fax: (201) 933-0746

West Coast Office: 315 West Pondera Street Suite F Lancaster, CA 93534 Phone: (800) 355-6478 Fax: (661) 940-1617