

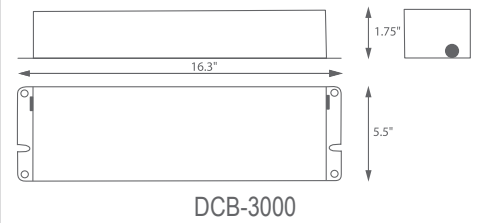


## Fluorescent *Emergency Lighting* Ballasts


### Models

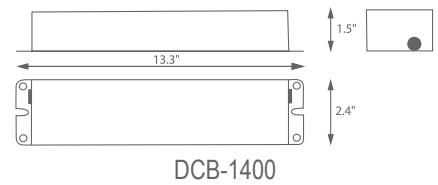


### Dimensions

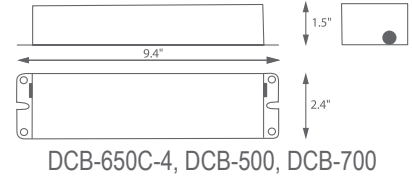


### Lamp Compatibility List



DCB-650C-4



DCB-500, DCB-700, DCB-1400

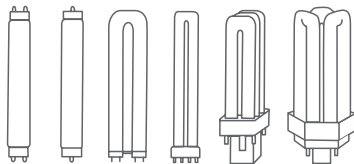

DCB-3000

Model	DCB-650C-4	DCB-500	DCB-700	DCB-1400	DCB-3000
<b>Lumens</b>	<b>650</b>	<b>500</b>	<b>700</b>	<b>1400</b>	<b>3000</b>
<b>Linear Lamps</b>					
<i>Number of Lamps Supported</i>					
2'-4' Rapid, Instant for Energy Savings T8-T12		1	1	1	1
2'-8' Rapid, Instant for Energy Savings T8-T12, HO, VHO			2	2	2
2'-8' Rapid, Instant for Energy Savings T8-T12, HO, VHO			1	1	1
20W - 40W Circline		1	1	1	1
20W - 40W Circline			2	2	2
28W, 54W T5 Lamps				1	1
<b>Compact Lamps</b>					
<i>Number of Lamps Supported</i>					
13, 18, 26 (4-pin)	1	1	1	1	1
13W-42W, Twin, Quad or Triple (4-pin)	1	1	1	1	1
40W Biax			1	1	1
40W Biax					2
50W Biax			1	1	1
55W Biax			1	1	1

*Other lamp types may operate with these ballasts. Please consult factory for compatibility.*