

# HA-66M Deluxe MultiMedia Headphones with Boom Mic

# Hamilton™

E L E C T R O N I C S

Ideal for today's classrooms, the HA-66M Deluxe MultiMedia Headphones combine high quality headphones with built-in boom microphone and volume control.

## Perfect for:

- Computer labs
- Language education
- Videoconferencing
- Gaming
- *And more!*

## Specifications:

### Headphones

|                    |                             |
|--------------------|-----------------------------|
| Speaker            | 40mm Mylar                  |
| Magnet             | Ferrite Cobalt              |
| Impedance          | 32 Ohms +/- 15% each side   |
| Frequency Response | 20-20,000 Hz                |
| Sensitivity        | 110dB SPL +/- 3dB at 1kHz   |
| Input              | Min. input 20 mw, Max 30 mw |
| R/L Output         | Diff. dB                    |
| Distortion         | 5% Max                      |

|                  |               |
|------------------|---------------|
| Input Connection | 3.5mm, stereo |
| Earpad           | Black vinyl   |
| Cord             | 7' straight   |


### Microphone

|                    |                               |
|--------------------|-------------------------------|
| Type               | Electret condenser            |
| Directivity        | Omni Directional              |
| Sensitivity        | -41dB, std. -38dB, max -35dB  |
| Frequency Response | 20-16,000Hz                   |
| Impedance          | 1,500 Ohms, +/-15%            |
| Operating Voltage  | Nominal +3V; Accepts 1.5V-10V |
| Output Connection  | 3.5mm, stereo                 |



**One Year Limited Warranty**  
**CE Rated for school use**

## Available From:

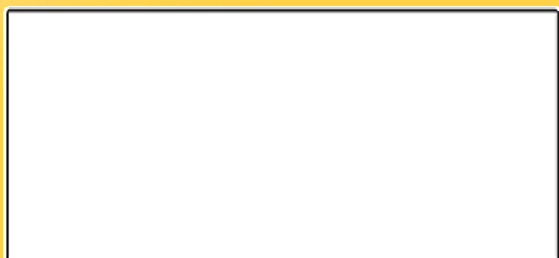

## Hamilton Electronics

55 Ruta Court, South Hackensack, NJ 07417

Sales: 800-348-6788 or 888-431-6000

Sales@hamiltonelectronics.com

Fax: 800-398-1812

[www.HamiltonElectronics.com](http://www.HamiltonElectronics.com)