

# Wall MonoRail Single Feed

700WMOP\_

1.6



## POWER FEED CANOPIES

### GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.

Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeter).

**NOTE:** The remote transformer should be installed prior to these steps. Refer to the instructions provided with the remote transformer.




### Install the 2" Square Power Feed Canopy

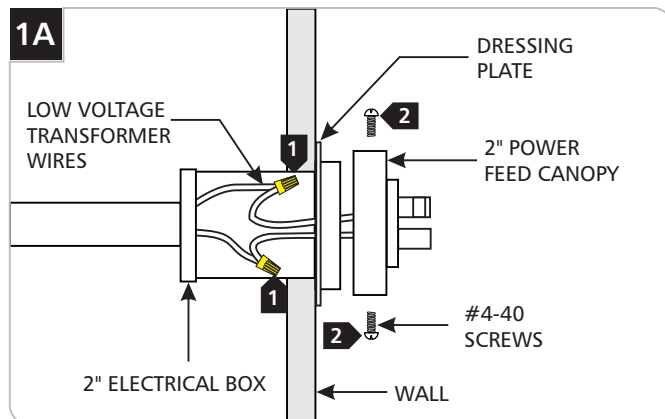

**NOTE:** 2" Electrical box should be installed prior to these steps. Refer to the instructions provided with the 2" electrical box.

- 1 Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the 2" electrical box with wire nuts.
- 2 Mount the 2" square canopy to the 2" electrical box with the two #4-40 screws.


### Install the 4" Round Power Feed Canopy

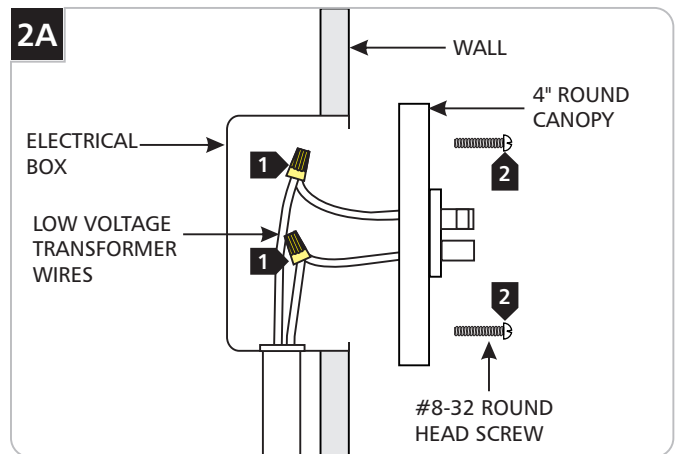


- 1 Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the electrical box with wire nuts.
- 2 Mount the 4" round power feed canopy to the electrical box with the two #8-32 screws.

**NOTE:** Use the provided universal round crossbar when the canopy holes do not line up with the electrical box holes.

## Install the Rectangular Power Feed Canopy

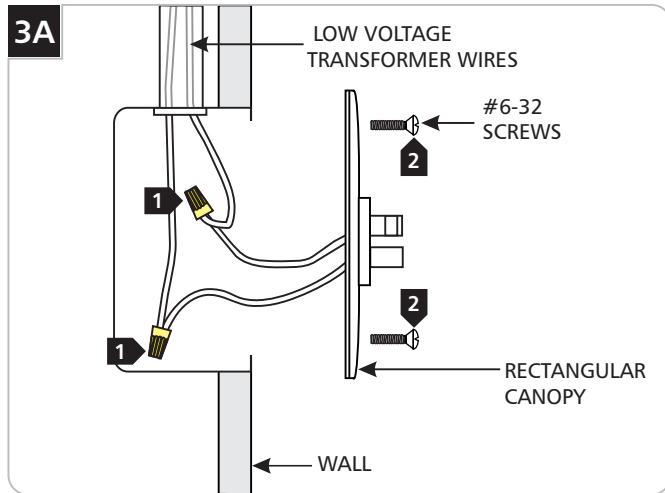


- 1** Connect the power feed canopy wires to the low voltage wires coming from the remote transformer in the electrical box with wire nuts.
- 2** Mount the rectangular power feed canopy to the electrical box with the two #6-32 screws.

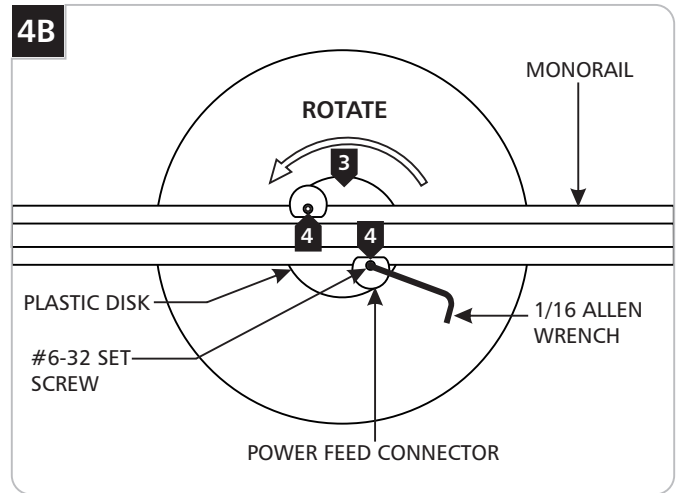

- 3** Rotate the plastic disk so that the power connector slots slide over the MonoRail.
- 4** Hold the power connectors in position and tighten the #6-32 set screws with the 1/16 Allen wrench.

## Connecting the MonoRail to Wall MonoRail Power Feed Canopy

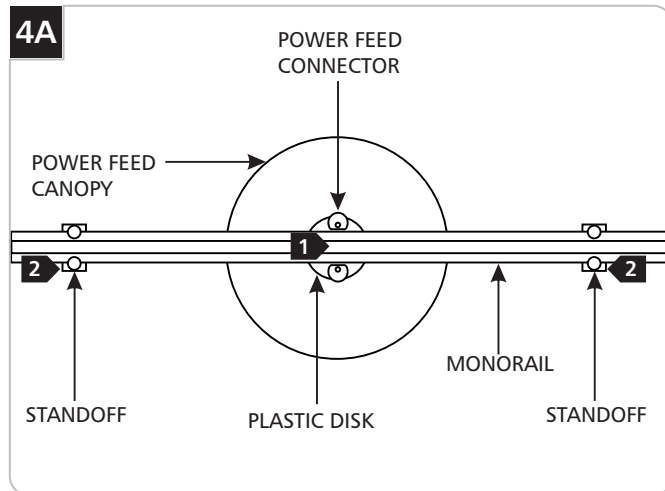

- 1** The Wall MonoRail standoffs and the power feed canopy should be inline so that the MonoRail runs through the center point of the power feed canopy plastic disk.
- 2** Connect the MonoRail to the standoffs (refer to the Wall MonoRail standoff instructions).

**SAVE THESE INSTRUCTIONS!**



**TECH LIGHTING®**

7400 Linder Ave, Skokie, IL 60077

847.410.4400

[www.techlighting.com](http://www.techlighting.com)

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.  
A Generation Brands Company