



Job Name:

Contact:

Fixture Type:

Part Number:

ZONYX ADJUSTABLE POWER STEM




Description:

The Adjustable Power Feed for Zonyx line voltage track system is field adjustable from 8" to 11-1/2". It covers a standard 3" - 4" junction box. Available with circuit breaker.

Part Numbers:

350125mc	matte chrome
350125mc/010	matte chrome with 1 amp breaker
350125mc/020	matte chrome with 2 amp breaker
350125mc/030	matte chrome with 3 amp breaker
350125mc/050	matte chrome with 5 amp breaker
350125mc/075	matte chrome with 7.5 amp breaker
350125mc/100	matte chrome with 10 amp breaker
350125mc/125	matte chrome with 12.5 amp breaker

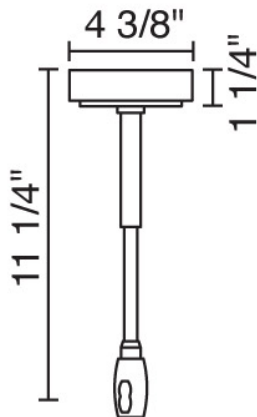

Technical Specs:

2400VA maximum
120VAC input
Suitable for dry location only
Mount to 3" - 4" round J-box
Switchable circuit breaker (1 - 25A)
Extendable from 13.88" - 24"