



ELF 15 CHANDELIER INSTALLATION INSTRUCTIONS

WARNING: DISCONNECT ALL POWER TO FIXTURE CIRCUIT BEFORE INSTALLATION.

1. THIS FIXTURE IS INTENDED TO MOUNTED OVER A STANDARD 4" OCTAGONAL J-BOX.
2. USING THE SCREWS SUPPLIED WITH JUNCTION BOX, INSTALL THE J-BOX CROSSBAR BRACKET.
3. TO ADJUST HEIGHT, LOOSEN SETSCREW FOR ELECTRICAL CABLE AND ADJUST TO DESIRED LENGTH, AND TIGHTEN (DO NOT OVERTIGHTEN). ADJUST SUSPENSION CABLES BY DEPRESSING SLIDE AND ADJUST ACCORDINGLY. ALL THREE SUPPORT CABLES SHOULD BE ADJUSTED EQUALLY.
3. CONNECT FIXTURE GROUND WIRE TO SUPPLY GROUND. SINCE THIS FIXTURE IS DC-BAYONET BASE, THE POLARITY IS NOT AN ISSUE. ONE WIRE TO 120V (HOT) AND THE OTHER TO NEUTRAL. IT DOES NOT MATTER WHICH. ALWAYS WIRE IN ACCORDANCE TO THE NEC AND ANY APPLICABLE LOCAL CODES.

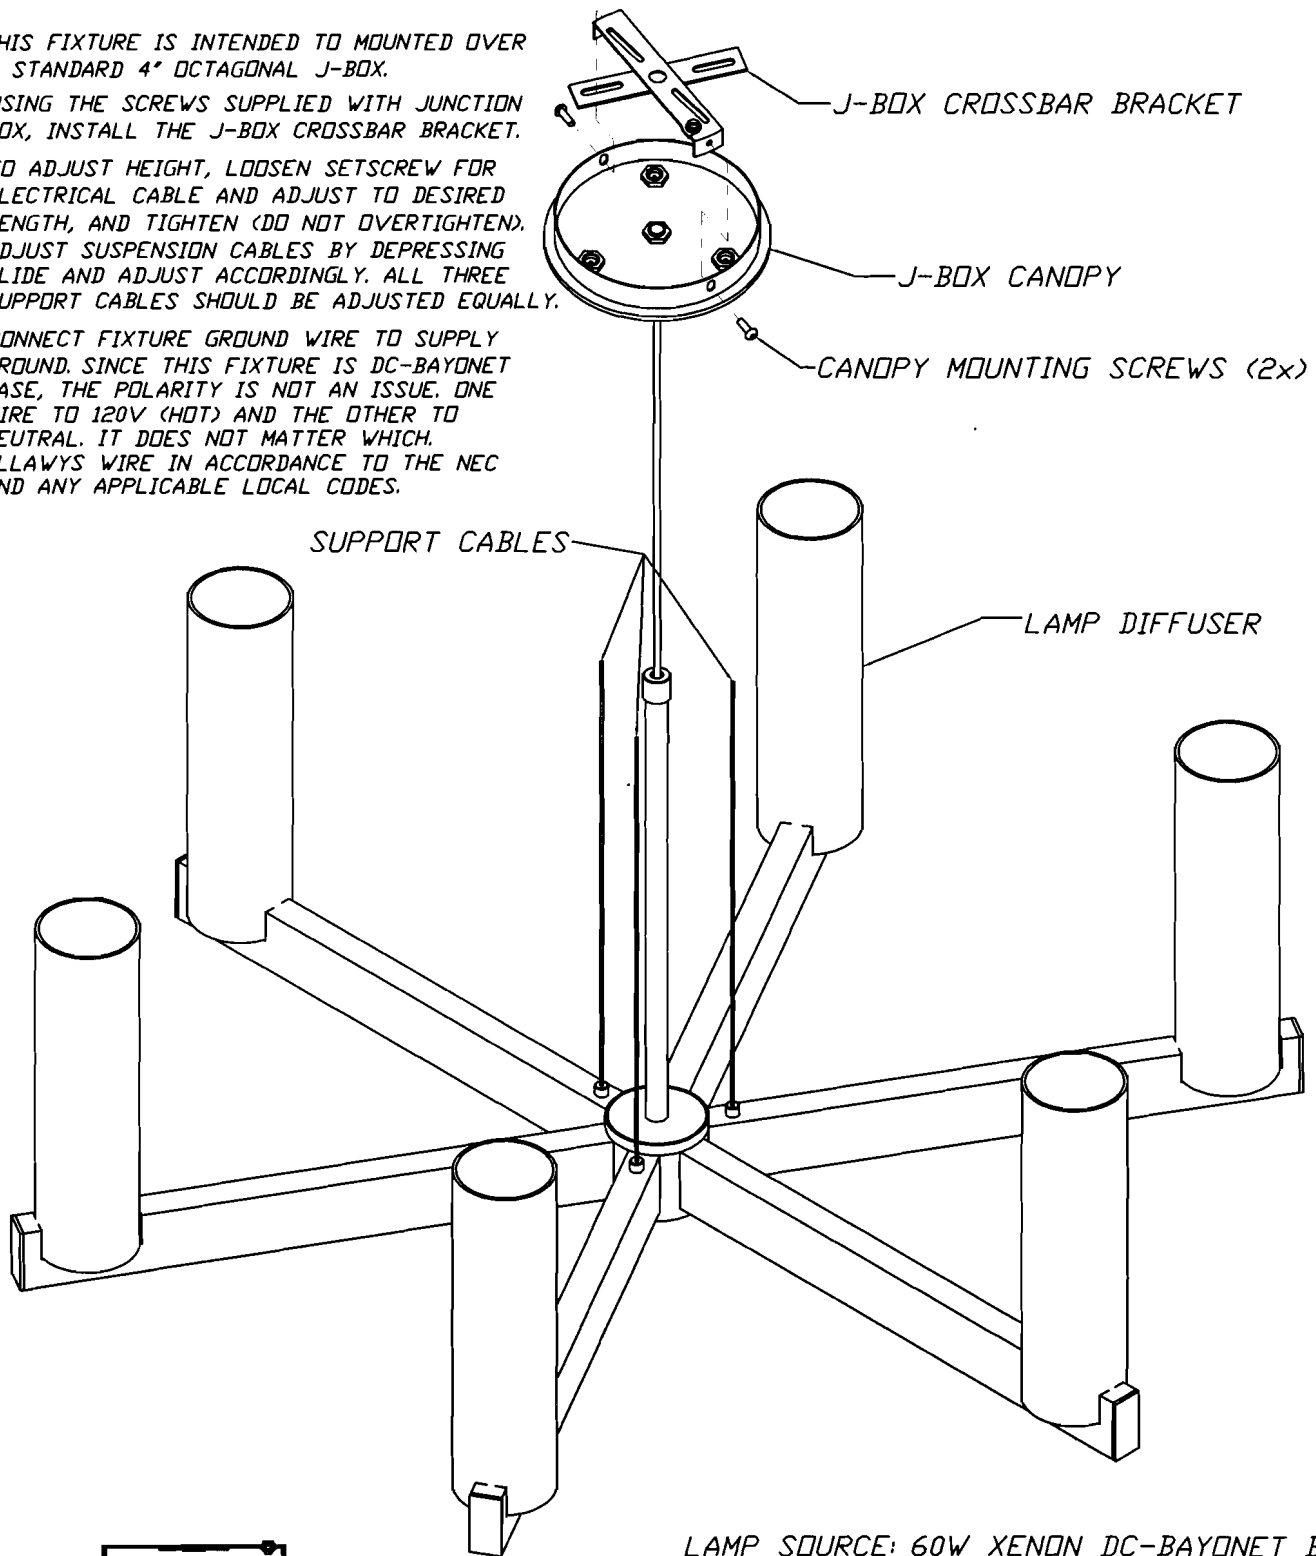

**LAMP SOURCE: 60W XENON DC-BAYONET BASE
FIXTURE WEIGHT: 11 LBS.**

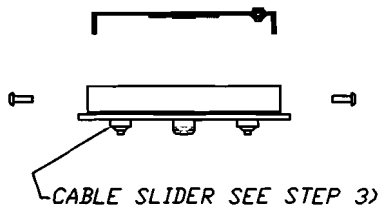

ILLUMINATING		EXPERIENCES			
		Nemo. Gruppo Cassina*			
		233 Cleveland Ave. Highland Park, New Jersey 08904			
		732.745.5858 Fax: 732.745.9710			
TITLE ELF 15 INSTALLATION INSTR.		DATE 4-22-05	SCALE 1/4	DRAWN STS	SIZE A
SHEET 1 OF 1		DWG. NO. I-0007		REV. 0	

THIS DOCUMENT IS THE PROPERTY OF ILLUMINATING EXPERIENCES INC. NO RIGHTS ARE GRANTED FOR REPRODUCTION, DISCLOSURE, OR USE.