


CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE TRACK HEAD

SERIES 204

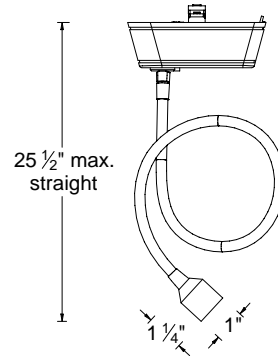

Ordering Matrix

Model			Series		Finish			
[]			[]		[]			
HHT	JHT	LHT	204	204L	BK	BN/BK	BN/WT	WT

Ordering Example (model – series – finish): HHT-204L-BK

Product Details

Description: Low voltage track head for use with W.A.C. brand H, L, J & J2 series track systems. In addition it may fit other manufacturer's original track (consult factory for specific brands).

Materials: Metal track head with polycarbonate transformer case and track adapter. Bi-pin ceramic socket for MR11 or MR16 lamp.

Aiming: 350° horizontal rotation and 90° vertical aiming. The ball and hub style aiming allows easy and fine adjustment to the desired angle.

Lamp & Transformer: MR11G or MR16G lamp. 50w max. for the 204 and 75w max. for the 204L. Lamp sold separately.
 Integral electronic transformer for 12 volt lamps. 120V input.
 Dimmable with electronic low voltage dimmers.

Systems: HHT is used with the W.A.C. H system track (HT).
 JHT is used with the W.A.C. J system and J2 system track (JT & J2-T).
 LHT is used with the W.A.C. L system track (LT).

Finish: Abrasion resistant powder coat paint finish. Black (BK), Brushed Nickel track head with Black transformer adapter (BN/BK), Brushed Nickel track head with White transformer adapter (BN/WT), or White (WT).

Listing: U.L. & C.U.L. listed. 2 year W.A.C. Lighting product warranty.

Specification Features

- "Quick-Ship" item, always in stock and available for immediate shipment.
- Electronic transformer has advanced auto-reset, soft start and short circuit protection features. The soft start delayed lamp start feature extends lamp life by delaying the abrupt inrush current to the lamp.
- Can use one lens accessory such as a colored dichroic lens, UV filter lens, frosted lens, etc. Order lens accessory and LENS-XX-CLIP. See catalog or website for full lens accessory selection.

Compatible Accessories

JCLIP
 Ordered when using track heads on 2nd circuit of J2 style track.



Order as JCLIP

Lens Clip
 Used to attach accessory lens to MR11 or MR16 lamp.



Order as LENS-XX-CLIP