# **Aliseo 18W Compact Fluorescent**



**Wall Sconces** 

### **GENERAL PRODUCT INFORMATION:**



This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is suitable for indoor dry locations only.

#### **CAUTION - RISK OF FIRE**


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN THE POWER TO THE ELECTRICAL BOX OFF.




## Install the Fixture

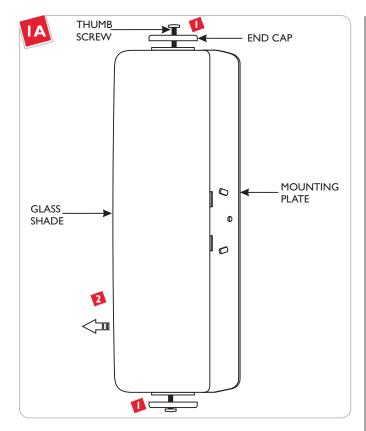

- Remove the two thumb screws and end caps from the top and bottom of the glass shade
- Remove the glass shade.

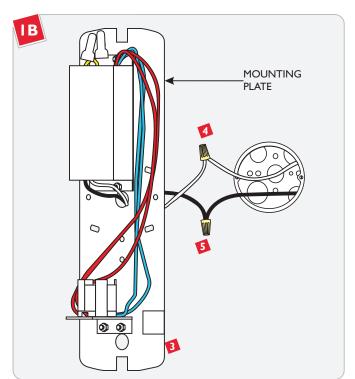


- In accordance with local electrical codes, make sure that the mounting plate is grounded.
- Connect the fixture white wire to the neutral power line wire with a wire nut.
- Connect the fixture black wire to the hot power line wire with a wire nut.

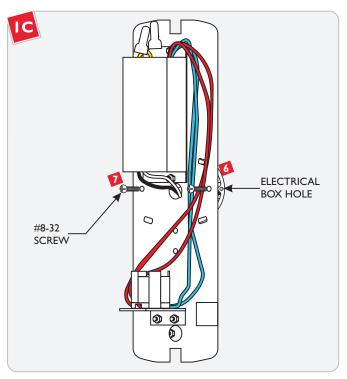

- Place all wires and wire nut connections properly inside the electrical box.
- Align the mounting plate holes with electrical box holes and tighten the two #8-32 screws to secure the fixture in place.


## Install the Lamp & Shade

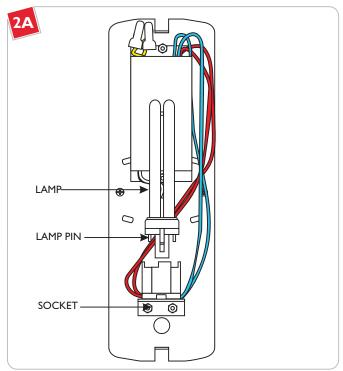

Use **MAX 18** Watt Type Quad Tube G24q-2 Base Compact Fluorescent.



Push the lamp pins completely into the socket holes.

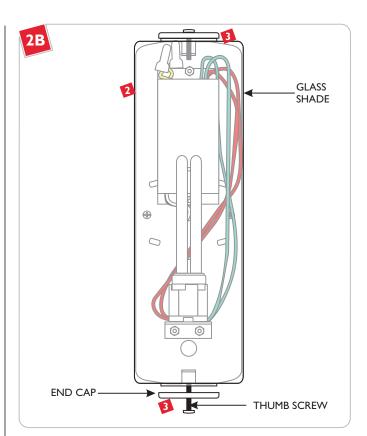

- 2 Place the glass shade onto the mounting plate.
- While supporting the glass shade in place replace the end caps and thumb screws on top and bottom of the shade. Make sure the thumb screws are tight to secure the glass shade in place.

**NOTE:** Do not over tighten the thumb screws which may cause the glass shade to break.

## **SAVETHESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077 800.323.3226 - 847.626.6300

### www.lbllighting.com

© 2008 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company